

Designing with the IP Integrator Demo Script

Introduction

This demonstration introduces the IP integrator (IPI) feature available in the AMD Vivado™ Design Suite.


Preparation:

- Required files: \$TRAINING_PATH/IP_Integrator/demo/KCU105/verilog
- Required hardware: None

Designing with the IP Integrator

Action with Description	Point of Emphasis and Key Takeaway
<ul style="list-style-type: none"> • Launch the Vivado Design Suite. 	
<ul style="list-style-type: none"> • Click the Create Project link in the Quick Start section of the Getting Started page. 	<ul style="list-style-type: none"> • The New Project link in the Getting Started page allows you to create a new Vivado Design Suite project.
<ul style="list-style-type: none"> • Create a new project using the New Project Wizard with the following details: <ul style="list-style-type: none"> • Project name: <i>project_IPI</i> • Project location: \$TRAINING_PATH/IP_Integrator/demo/KCU105/verilog • Select Do not specify the sources at this time. • Select the KCU105 Board. 	<ul style="list-style-type: none"> • By default, the Vivado IDE creates the project name as <i>project_1</i>.
<ul style="list-style-type: none"> • Click Create Block Design under IP Integrator in the Flow Navigator. 	<ul style="list-style-type: none"> • The IP integrator allows you to: <ul style="list-style-type: none"> • Create a new block design • Open an existing block design • Generate the block design
<ul style="list-style-type: none"> • Enter subsystem_1 as the design name in the Create Block Design dialog box. • Click OK to open a new, blank IP integrator canvas 	<ul style="list-style-type: none"> • The canvas provides options to: <ul style="list-style-type: none"> • Add IPs (Add IP) into the subsystem • Validate the subsystem (Validate Design)

Action with Description	Point of Emphasis and Key Takeaway
<ul style="list-style-type: none"> Click the Add IP link in the canvas. <ul style="list-style-type: none"> Alternatively, you can click the Add IP icon (+) from the horizontal toolbar. 	<ul style="list-style-type: none"> This opens the IP repository of our IPs and third-party IPs. IPs can be searched by name via the Search field.
<ul style="list-style-type: none"> Enter AXI Interconnect in the Search field. Select the AXI Interconnect IP from the results. Double-click the IP. 	<ul style="list-style-type: none"> This adds the AXI Interconnect IP into the subsystem.
<ul style="list-style-type: none"> Similarly, add the AXI Uartlite IP to the block design in the same way. 	<ul style="list-style-type: none"> Adding the AXI uartlite IP into the subsystem.
<ul style="list-style-type: none"> Add the AXI IIC IP to the block design. 	<ul style="list-style-type: none"> Adding the AXI IIC IP into the subsystem. IP has been added to the IP integrator canvas. Now, it is time to connect IPs together to create a subsystem.

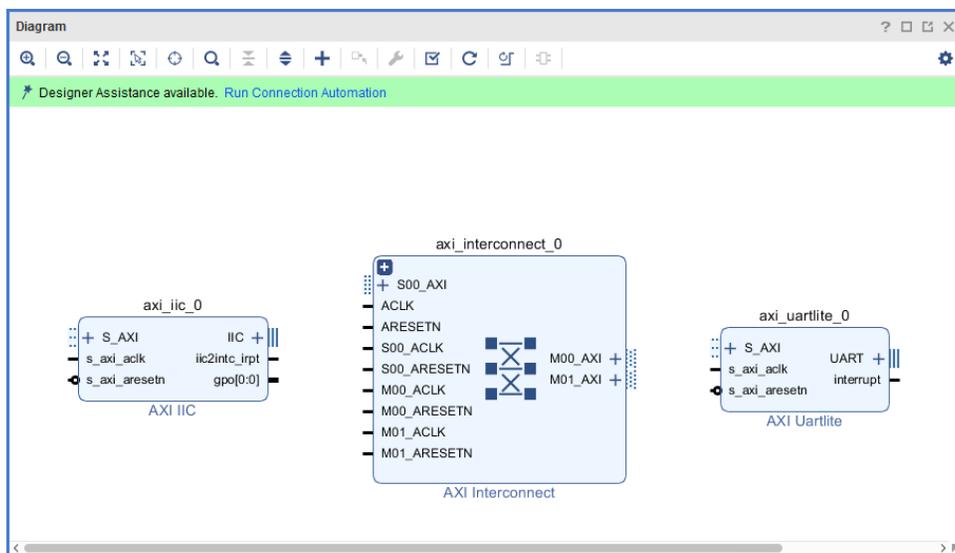

Action with Description	Point of Emphasis and Key Takeaway
<ul style="list-style-type: none"> • Select the S00_AXI interface in the AXI Interconnect IP. • Right-click and select Create Interface Port. • Click OK in the dialog box to make the S00_AXI interface as an interface port. 	<ul style="list-style-type: none"> • This is used to create ports on the interfaces, which are groupings of signals that share a common function. <ul style="list-style-type: none"> • For example, S_AXI is an interface port on several AMD IPs. The command gives more control in terms of specifying the interface type and the mode (master/slave). • You specify the interface name, the vendor, library, name, and version (VLNV), as well as the mode (MASTER or SLAVE or MONITOR) in this dialog box.
<ul style="list-style-type: none"> • Select the ACLK port in the AXI Interconnect IP. • Right-click and select Create Port. • Enter 100 in the Frequency (MHz) field of the dialog box. • Click OK in the dialog box to make ACLK as a top-level port. 	<ul style="list-style-type: none"> • Create Port gives you more control in terms of specifying the input/output and the bit width and the type (clk, reset, data). • In the case of a clock, you can even specify the input frequency.
<ul style="list-style-type: none"> • Select the ARESETN port in the AXI Interconnect IP. • Right-click and select Create Port. • Click OK in the dialog box to make ARESETN as a top-level port. 	<ul style="list-style-type: none"> • You can change the polarity of the reset in the Customize Port dialog box.
<ul style="list-style-type: none"> • Double-click the ARESETN port to open the Customize Port dialog box. • Select the ACTIVE LOW option and click OK. 	
<ul style="list-style-type: none"> • Place the cursor on the S00_ACLK port of the AXI Interconnect block. 	<ul style="list-style-type: none"> • Making connections in IP integrator is simple. <ul style="list-style-type: none"> • As you move the cursor near an interface or pin connector on an IP block, the cursor changes into a pencil. • You can then click an interface or pin connector on an IP block, hold down the left mouse button, and then draw the connection to the destination block.

Action with Description	Point of Emphasis and Key Takeaway
<ul style="list-style-type: none"> Click-and-drag the cursor from S00_ACLK to ACLK. Make the following connections in the same way: <ul style="list-style-type: none"> M00_ACLK → ACLK M01_ACLK → ACLK 	<ul style="list-style-type: none"> As you drag the connection wire, a green check appears on the ACLK port, indicating that a valid connection can be made between these ports. The Vivado IP integrator highlights all possible connection points in the subsystem.
<ul style="list-style-type: none"> Click-and-drag the cursor from S00_ARESETN to ARESETN. Make the following connections in the same way: <ul style="list-style-type: none"> M00_ARESETN → ARESETN M01_ARESETN → ARESETN 	<ul style="list-style-type: none"> The pencil symbol makes it easy for making connections.
<ul style="list-style-type: none"> Make the following connections between the AXI uartlite IP and AXI Interconnect IP: <ul style="list-style-type: none"> S_AXI → M00_AXI s_axi_aclk → ACLK s_axi_aresetn → ARESETN 	
<ul style="list-style-type: none"> Make the following connections between the AXI IIC IP and AXI Interconnect IP: <ul style="list-style-type: none"> S_AXI → M01_AXI s_axi_aclk → ACLK s_axi_aresetn → ARESETN 	
<ul style="list-style-type: none"> Click the Run Connection Automation link in the banner at the top of the design canvas. Select /axi_iic_0/IIC and click OK. 	<ul style="list-style-type: none"> Run Connection Automation provides assistance in hooking interfaces and/or ports to external I/O ports. This makes the iic port of the AXI IIC IP as an external port.
<ul style="list-style-type: none"> Click the Run Connection Automation link again. Select axi_uartlite_0/UART and click OK. 	<ul style="list-style-type: none"> This makes the UART port of the AXI uartlite IP as an external port.
<ul style="list-style-type: none"> Click the Validate Design icon (☑) in the Diagram tab to validate the block design. In the Auto assign address dialog box, click Yes to auto-assign the address segments. Click OK after validation is successful. 	<ul style="list-style-type: none"> The Vivado IP integrator runs basic design rule checks in real time as the design is being put together. Validate Design runs a comprehensive design check on the design.

Action with Description	Point of Emphasis and Key Takeaway
<ul style="list-style-type: none"> Select the subsystem_1 block design in the Hierarchy tab of the Sources window. Right-click and select Generate Output Products. Click Generate in the dialog box to generate the output products for the subsystem. Click OK if the Generate Output Products dialog box prompts. 	<ul style="list-style-type: none"> Once the block diagram is complete and the design is validated, there are two more steps required to complete the design. First, the output products must be generated. This is when the source files and the appropriate constraints for all the IPs will be generated and made available in the Vivado IDE Sources pane. Depending upon the target language selected during project creation, appropriate files will be generated.
<ul style="list-style-type: none"> Select Verilog as the Target language from the Settings. Right-click subsystem_1 in the Hierarchy tab of the Sources window and select Create HDL Wrapper. Click OK in the Create HDL Wrapper dialog box. 	<ul style="list-style-type: none"> An IP integrator block diagram can be integrated into a higher-level design or it can be the highest level in the design hierarchy. To integrate the IP integrator design into a higher-level design, simply instantiate the design in the top-level HDL file.
<ul style="list-style-type: none"> Enter <code>write_bd_tcl \$::env(TRAINING_PATH)/IP_Integrator/demo/KCU105/verilog/IPI.tcl</code> in the Tcl Console to generate the Tcl script. 	<ul style="list-style-type: none"> The Tcl script enables designers to re-create entire block design just by running this Tcl script.
<ul style="list-style-type: none"> Run implementation to implement the IPI subsystem. 	
<ul style="list-style-type: none"> Click Cancel in the Open Implemented Design dialog box. 	
<ul style="list-style-type: none"> Select File > Exit. 	<ul style="list-style-type: none"> This option closes the Vivado Design Suite.

Summary

In this demonstration, you walked through creating a simple Vivado IP integrator subsystem design by integrating some common peripherals and cores and connecting them via an AXI Interconnect block. You then created the top-level HDL wrapper for the completed subsystem design, which was later implemented in the Vivado Design Suite.

References:

- Supporting materials
 - Vivado Design Suite User Guide: Designing IP Subsystems Using IP Integrator (UG994)*