

PlanAhead Software Tutorial

Design Analysis and Floorplanning for Performance

UG 676 (v 12.3) September 21, 2010





Xilinx is disclosing this Document and Intellectual Property (hereinafter "the Design") to you for use in the development of designs to operate on, or interface with Xilinx FPGAs. Except as stated herein, none of the Design may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form or by any means including, but not limited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Xilinx. Any unauthorized use of the Design may violate copyright laws, trademark laws, the laws of privacy and publicity, and communications regulations and statutes.

Xilinx does not assume any liability arising out of the application or use of the Design; nor does Xilinx convey any license under its patents, copyrights, or any rights of others. You are responsible for obtaining any rights you may require for your use or implementation of the Design. Xilinx reserves the right to make changes, at any time, to the Design as deemed desirable in the sole discretion of Xilinx. Xilinx assumes no obligation to correct any errors contained herein or to advise you of any correction if such be made. Xilinx will not assume any liability for the accuracy or correctness of any engineering or technical support or assistance provided to you in connection with the Design.

THE DESIGN IS PROVIDED "AS IS" WITH ALL FAULTS, AND THE ENTIRE RISK AS TO ITS FUNCTION AND IMPLEMENTATION IS WITH YOU. YOU ACKNOWLEDGE AND AGREE THAT YOU HAVE NOT RELIED ON ANY ORAL OR WRITTEN INFORMATION OR ADVICE, WHETHER GIVEN BY XILINX, OR ITS AGENTS OR EMPLOYEES. XILINX MAKES NO OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED, OR STATUTORY, REGARDING THE DESIGN, INCLUDING ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT OF THIRD-PARTY RIGHTS.

IN NO EVENT WILL XILINX BE LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, EXEMPLARY, SPECIAL, OR INCIDENTAL DAMAGES, INCLUDING ANY LOST DATA AND LOST PROFITS, ARISING FROM OR RELATING TO YOUR USE OF THE DESIGN, EVEN IF YOU HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THE TOTAL CUMULATIVE LIABILITY OF XILINX IN CONNECTION WITH YOUR USE OF THE DESIGN, WHETHER IN CONTRACT OR TORT OR OTHERWISE, WILL IN NO EVENT EXCEED THE AMOUNT OF FEES PAID BY YOU TO XILINX HEREUNDER FOR USE OF THE DESIGN. YOU ACKNOWLEDGE THAT THE FEES, IF ANY, REFLECT THE ALLOCATION OF RISK SET FORTH IN THIS AGREEMENT AND THAT XILINX WOULD NOT MAKE AVAILABLE THE DESIGN TO YOU WITHOUT THESE LIMITATIONS OF LIABILITY.

The Design is not designed or intended for use in the development of on-line control equipment in hazardous environments requiring fail-safe controls, such as in the operation of nuclear facilities, aircraft navigation or communications systems, air traffic control, life support, or weapons systems ("High-Risk Applications") Xilinx specifically disclaims any express or implied warranties of fitness for such High-Risk Applications. You represent that use of the Design in such High-Risk Applications is fully at your risk.

© 2010 Xilinx, Inc. All rights reserved. XILINX, the Xilinx logo, and other designated brands included herein are trademarks of Xilinx, Inc. All other trademarks are the property of their respective owners.

Demo Design License

© 2010 Xilinx, Inc.

This Design is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Library General Public License along with this design file; if not, see: <http://www.gnu.org/licenses/>



The PlanAhead™ software code includes source code for the following programs:

CenterPoint XML

The initial developer of the Original Code is CenterPoint – Connective Software.
Software Engineering GmbH.
Portions created by CenterPoint – Connective Software
Software Engineering GmbH are Copyright © 1998-2000
CenterPoint - Connective Software Engineering GmbH. All Rights Reserved.
Source Code for CenterPoint is available at <http://www.cpointc.com/XML/>

NLView Schematic Engine

Copyright © Concept Engineering.

Static Timing Engine by Parallax Software Inc.

Copyright © Parallax Software Inc.

Java Two Standard Edition

Includes portions of software from RSA Security, Inc. and some portions licensed from IBM are available at
<http://oss.software.ibm.com/icu4j/>

Powered By JIDE

<http://www.jidesoft.com>

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.



Free IP Core License

This is the Entire License for all of our Free IP Cores.

Copyright (C) 2000-2003, ASICs World Services, LTD. AUTHORS

All rights reserved.

Redistribution and use in source, netlist, binary and silicon forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of ASICs World Services, the Authors and/or the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Table of Contents

Design Analysis and Floorplanning for Performance.....	7
Introduction	7
Sample Design Data	7
Xilinx ISE and PlanAhead Software.....	8
Xilinx Command Line Tools	8
Required Hardware	8
PlanAhead Software Documentation and Information.....	8
Tutorial Objective	8
Tutorial Steps	9
Step 1: Viewing the Device Resources and Clock Regions Step 1	10
Step 2: Exploring the Logical Netlist Hierarchy Step 2.....	16
Step 3: Displaying Design Resources Statistics Step 3	18
Step 4: Running Design Rule Checks (DRC) Step 4	21
Step 5: Performing Timing Analysis Step 5.....	23
Step 6: Modifying or Creating Timing Constraints Step 6	28
Step 7: Exploring Logic in the Schematic Step 7	33
Step 8: Implementing the Design Step 8.....	39
Step 9: Analyzing the Timing Results Step 9	43
Step 10: Highlighting Module Level Placement Step 10	47
Step 11: Exploring Connectivity Step 11	49
Step 12: Using Placement Constraints Step 12.....	52
Step 13: Viewing Hierarchical Connectivity Step 13	55
Step 14: Using the Search Capability to View Clock Domains Step 14.....	61
Step 15: Floorplanning Timing-Critical Hierarchy Step 15	63
Conclusion	66

PlanAhead Software Tutorial

Design Analysis and Floorplanning for Performance

Introduction

This tutorial introduces some of the capabilities and benefits of using the Xilinx® PlanAhead™ software for designing high-end FPGAs. The document consists of a series of step-by-step exercises highlighting methods to achieve and maintain better performing designs in less time. The steps detail the following:

- Pre-implementation design and analysis capabilities.
- Implementation exploration features.
- Implementation results floorplanning.

Note: This tutorial covers a subset of the features of the PlanAhead software product bundled with the ISE® Design Suite. Additional features are covered in detail in other tutorials.

If you have any questions or comments regarding this tutorial, contact Xilinx Technical Support.

Sample Design Data

This tutorial uses sample design data that is included with the PlanAhead software. The tutorial design data is located in the following directory:

`<ISE_install_Dir>/PlanAhead/testcases/PlanAhead_Tutorial.zip`

Extract the zip file into any write-accessible location to perform the tutorial. The location of the unzipped PlanAhead_Tutorial data is referred to as the `<Extract_Dir>` throughout this document.

Note: If you are using the location, `<ISE_install_Dir>/PlanAhead/testcases/PlanAhead_Tutorial`, you can use the **Getting Started > Open an Example Project** links to open the tutorial designs. When you run the tutorial exercises, the sample design data is modified.

Each time you run through the tutorial a new copy of the original PlanAhead_Tutorial data is required. This tutorial requires that you run a design through implementation.

This design is intentionally small to allow the tutorial to be run with minimal hardware requirements and to enable timely completion of the labs. It may not be the best candidate for performance improvement through floorplanning because typically the best results are seen with the larger devices.

Xilinx ISE and PlanAhead Software

The PlanAhead software is installed with ISE Design Suite. Before starting the tutorial, ensure that the software is operational and the sample design data is installed. For installation instructions and information, refer to *ISE Design Suite 12: Installation, Licensing, and Release Notes*:

http://www.xilinx.com/support/documentation/sw_manuals/xilinx12_3/irn.pdf

Access to the Xilinx ISE Placement and Routing software is required. The tutorial results may be different with other ISE releases.

Xilinx Command Line Tools

To perform this tutorial, you must have access to the Xilinx command line tools, including the following: NGDBuild, Map, PAR, TRACE and XDL. Previously run ISE results are included and used in the tutorial.

Required Hardware

A minimum of 2 GB or more of RAM is recommended for use with PlanAhead software on larger devices. For this tutorial, a smaller xc6vlx75t design is used, and the number of Planners open at one time is limited. 1 GB is sufficient, but it will impact performance.

PlanAhead Software Documentation and Information

For information about the PlanAhead software, see the following documents:

- *PlanAhead User Guide* (UG632) - Provides detailed information about the PlanAhead software.
http://www.xilinx.com/support/documentation/sw_manuals/xilinx12_3/PlanAhead_UserGuide.pdf
- *Floorplanning Methodology Guide* (UG633) - Provides floorplanning hints.
http://www.xilinx.com/support/documentation/sw_manuals/xilinx12_3/Floorplanning_Methodology_Guide.pdf

For additional information about PlanAhead, including video demonstrations that cover the benefits of using the software and more tutorials, go to <http://www.xilinx.com/planahead>.

Tutorial Objective

This tutorial takes you through of the various analysis, floorplanning and implementation features of the PlanAhead software. The exercises cover the following topics:

- Analyze device utilization statistics to target alternate devices and choose the optimal device.
- Run Design Rule Checks (DRC) to quickly resolve constraint conflicts that would otherwise cause implementation errors.
- Use the Netlist, Logic Hierarchy, and Schematic views to explore logic.
- Perform a quick estimation of timing performance to assess design feasibility and identify potential problem areas.
- View, modify, or create constraints in the design.
- Analyze the design hierarchical connectivity and data flow as well as identify critical logic connectivity and clock domains.
- Floorplan the timing critical logic to improve timing.

When completing this tutorial, focus on the processes and functionality of the PlanAhead software to determine how you can take advantage of these features in your designs.

Tutorial Steps

This tutorial is separated into steps, followed by general instructions and supplementary detailed steps allowing you to make choices based on your skill level as you progress.

This tutorial introduces the pre-implementation design analysis features of the PlanAhead software. These features enable early detection of potential design issues, exploration of alternate devices, and floorplanning.

This tutorial has the following steps:

- Step 1: Viewing the Device Resources and Clock Regions
- Step 2: Exploring the Logical Netlist Hierarchy
- Step 3: Displaying Design Resources Statistics
- Step 4: Running Design Rule Checks (DRC)
- Step 5: Performing Timing Analysis
- Step 6: Modifying the Design Timing Constraints
- Step 7: Exploring Logic in the Schematic
- Step 8: Implementing the Design
- Step 9: Analyzing the Timing Results
- Step 10: Highlighting Module Level Placement
- Step 11: Exploring Connectivity
- Step 12: Using Placement Constraints
- Step 13: Viewing Hierarchical Connectivity
- Step 14: Using the Search Capability to View Clock Domains
- Step 15: Floorplanning Timing Critical Hierarchy

If you need help completing a general instruction, go to the detailed steps below it, or if you are ready, skip the step-by-step directions and move on to the next general instruction.

Step 1: Viewing the Device Resources and Clock Regions Step 1

1-1. Launch the PlanAhead software.

1-1-1. Open the *CPU (Synthesized)* Project with the **top_full** Constraint Set active.

- On Windows, select the Xilinx PlanAhead 12 Desktop icon or click **Start > Programs > Xilinx ISE Design Suite 12.3 > PlanAhead > PlanAhead**.
- On Linux, cd to the `<Extract_Dir>/PlanAhead_Tutorial/Tutorial_Created_Data` directory, and enter **planAhead**.

The PlanAhead environment opens (Figure 1).

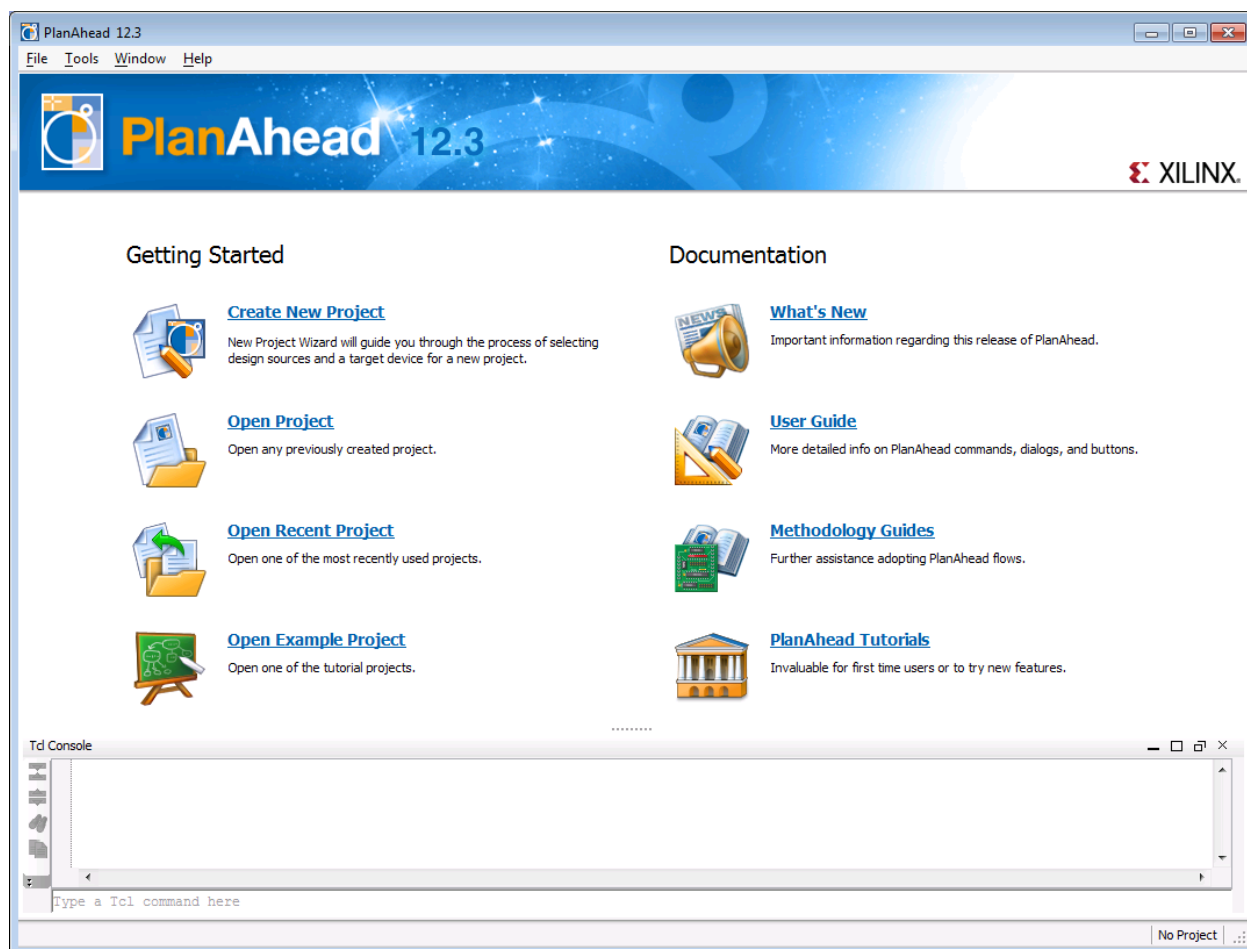


Figure 1: PlanAhead Getting Started Page

Notice the *PlanAhead Getting Started* page with links to open or create projects and to view documentation.

1-1-2. Select **File > Open Example Project > CPU (Synthesized)**.

The PlanAhead environment opens (Figure 2).

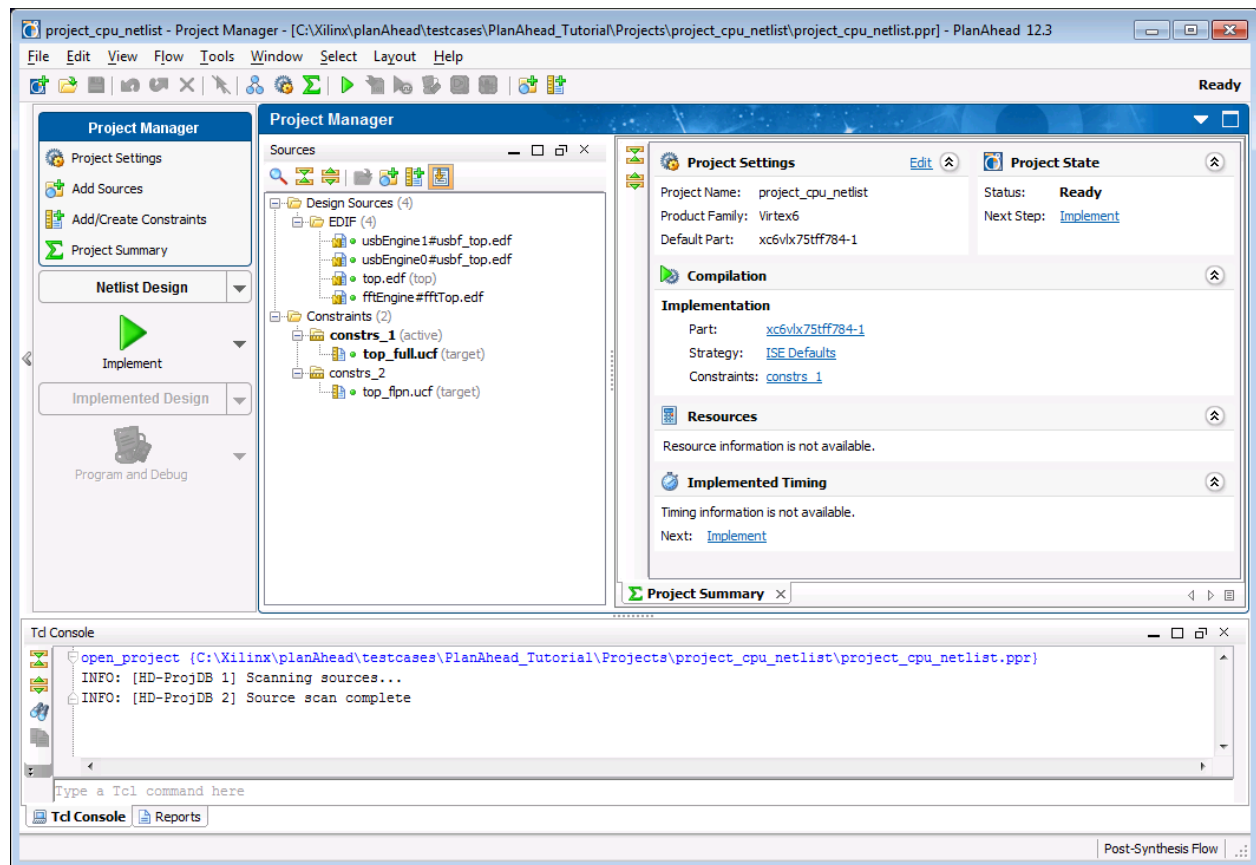


Figure 2: PlanAhead Environment

- 1-1-3. In the PlanAhead main window, ensure that the Constraints `constrs_1> top_full.ucf` is active (Figure 3).

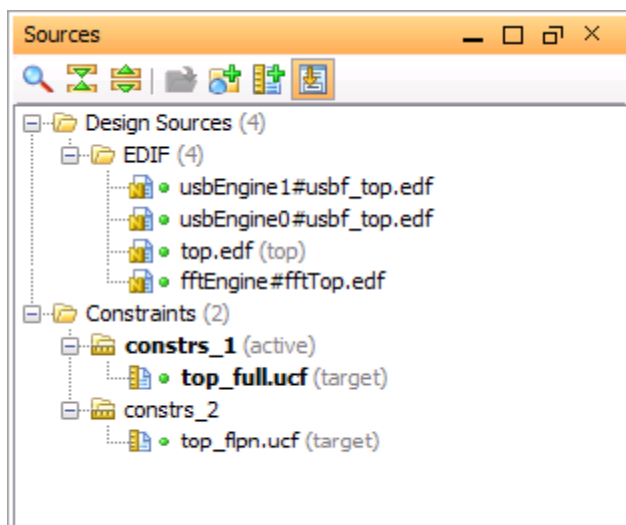


Figure 3: Sources View with Constrs_1

1-1-4. Open the design and constraints by clicking on **Netlist Design** in the Flow Navigator (Figure 4).



Figure 4: Netlist Design button

1-1-5. The tool will now open the netlist and top_full.ucf as shown (Figure 5).

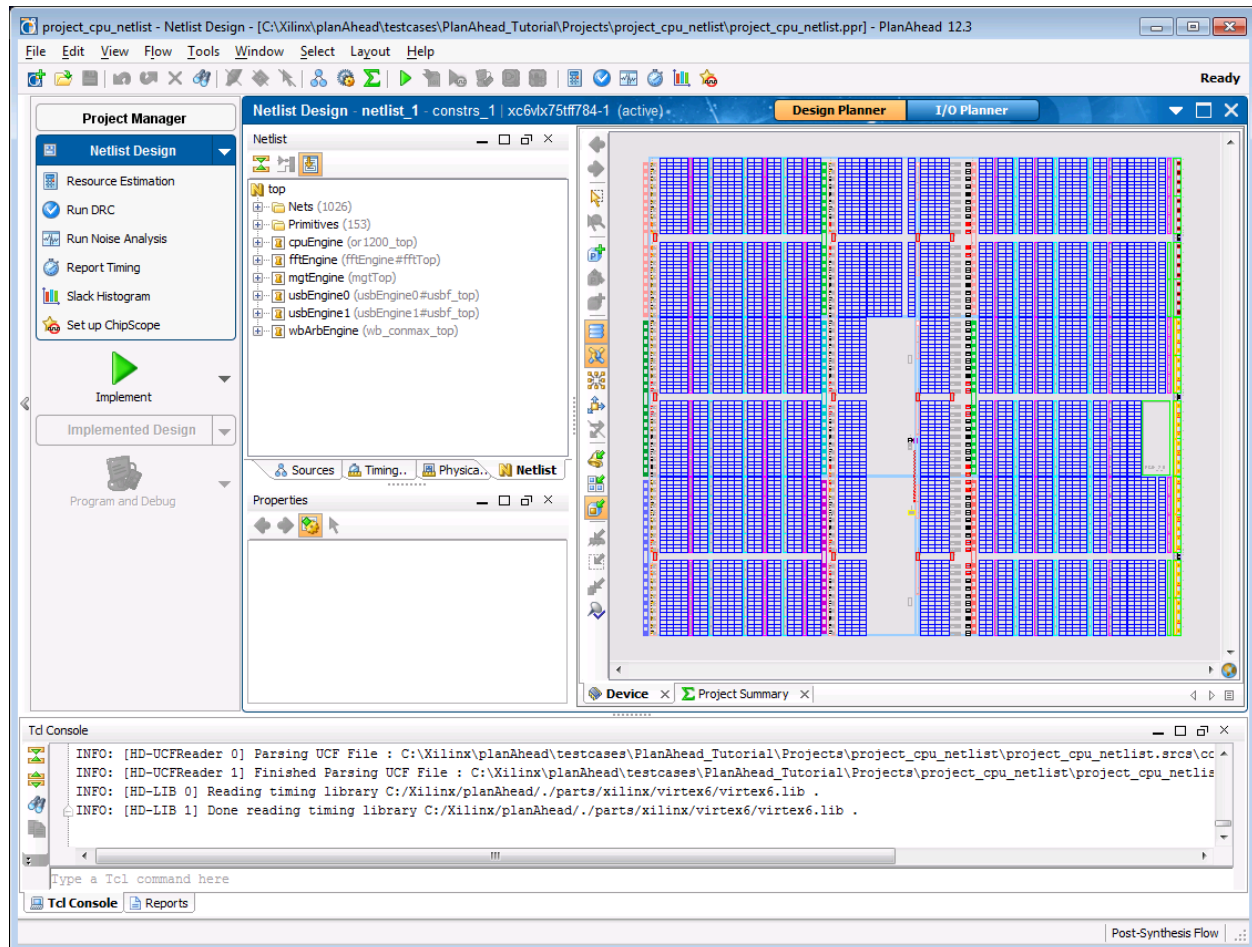


Figure 5: CPU Netlist in Netlist Design

1-1-6. In the Device view, use Zoom Area to examine various device resources as follows:

Click in the upper left corner of the device, and drag down and to the right. This will draw a Zoom Area rectangle. Repeat to generate an area small enough to see the device resources (Figure 6).



Figure 6: Zooming into the Device to view CLBs and Logic Gate Sites.

- 1-1-7.** Slowly, move the cursor over the various device resources to view the tooltips, and take note of the following:
- SLICE coordinates appear in the status bar at the bottom of the PlanAhead main window.
 - If the mouse lingers on a site a tooltip shows the same.
 - I/O port locations and I/O buffer assignments appear inside I/O banks.
 - Tall magenta tiles indicate a RAMB36 site that can also hold two RAMB18s or a FIFO.
 - Tall cyan tiles indicate sites for two DSP48s.
 - Square blue tiles are a CLB containing 2 SLICES.

1-2. Select any sites and notice that the Site Properties view displays information about the site.

- 1-2-1.** Select several different types of Sites and view the Site Property information.
- 1-2-2.** Click in the Device view and drag the cursor up and to the left, or press the **Ctrl+G** keys to Zoom Fit the Device view to see the whole device.

The Device view shows the clock regions, which you can use to help guide floorplanning. The Clock Region view lists all of the Clock Regions in the device. The Clock Region Properties view displays clock region information to indicate potential clock contentions prior to implementation. Viewing Clock domains is covered later in the tutorial.

1-3. Open the Clock Regions view.

- 1-3-1.** Display a clock region in the Device view as follows:
- Select the **Window > Clock Regions** command.
 - Select one of the clock regions listed in the table.

The clock region is highlighted in the Device view (Figure 7).

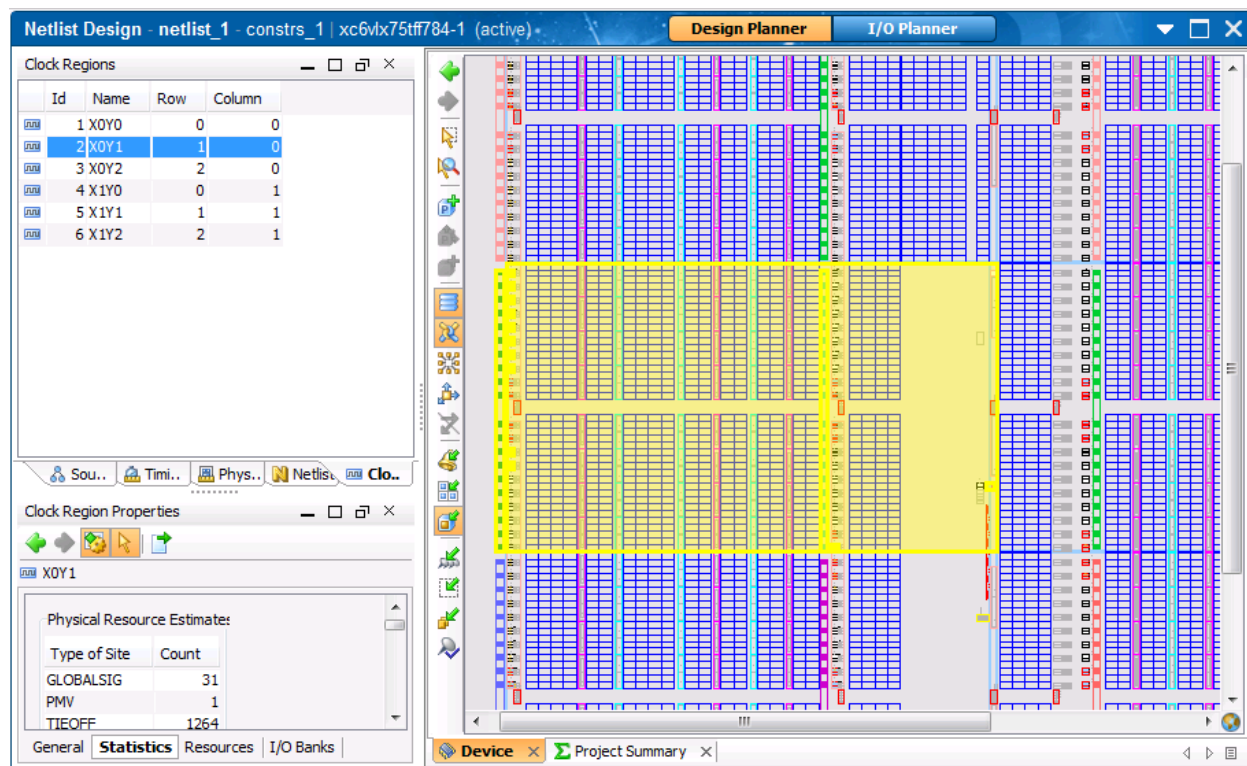




Figure 7: Viewing Clock Region Properties

- 1-3-2.** Click the **Properties** view to show the Clock Region Properties view. If the properties window is not visible use the **Windows > Properties** command.
- 1-3-3.** Click the **Statistics** tab, and scroll to examine the logic contents. (Shown in the bottom of Figure 7).

1-4. Explore Clock Region resources

- 1-4-1.** In Properties click on the Resources tab to see the locations of the BUFR and IDELAYCTRL sites.
- 1-4-2.** In the Resources list, select one of the **BUFRs**, and notice it is highlighted in the Device view.
- 1-4-3.** Right-click and select **Mark** to mark the site.
- 1-4-4.** Select the Fit Selection toolbar button  to view the selected objects.
- 1-4-5.** Select the **Unmark All** toolbar button  to remove the mark.
- 1-4-6.** In the Device view, Zoom Fit to fit the whole device.
- 1-4-7.** In the Clock Region Properties view, click the **I/O Banks** tab to examine the I/O Banks related to the clock region.
- 1-4-8.** In the Clock Region Properties view, select one of the I/O banks, and notice it is highlighted in the Device view as well.

- 1-4-9.** Click the **I/O Planner** button.  from the title bar to enter the pin planning layout.

The view layout has changed to make it easier for pin planning. The Package view is now open. The I/O bank is highlighted in both the Device and Package views.

- 1-4-10.** Click the **Design Planner** button  to return to the default layout.

Step 2: Exploring the Logical Netlist Hierarchy

Step 2

2-1. Use the Netlist view to explore the design hierarchy.

2-1-1. In the Netlist view, click the **Collapse All** toolbar button .

2-1-2. Click the expand widget  next to `cpuEngine` to expand the module.

The Netlist should now look similar to the one shown below (Figure 8).

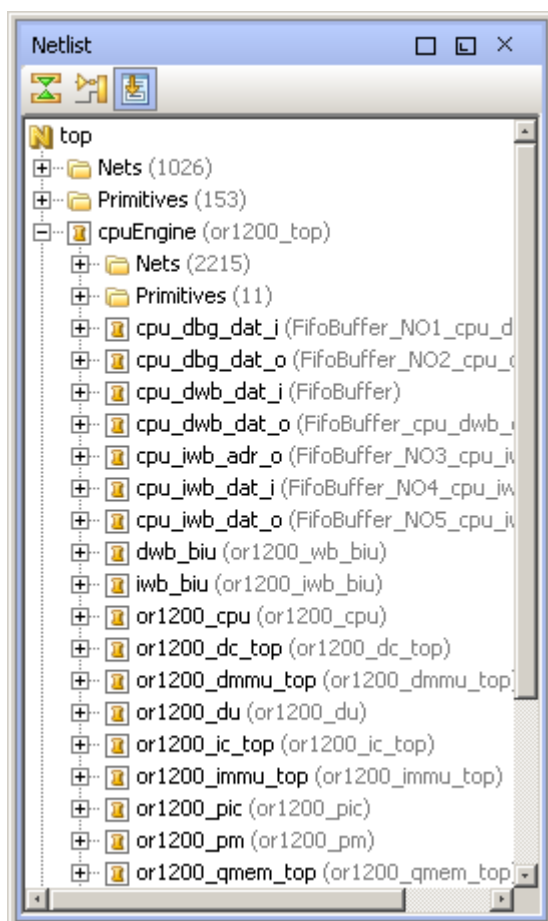


Figure 8: Expanding the Netlist View

Note: There is a Primitives folder in the Netlist view that contains the top-level instances of each module.

2-1-3. Expand the Primitives folder. These are the instances immediately under the `cpuEngine` level, not in any sub-module.

2-1-4. Expand the Nets folder. These are the nets immediately under `cpuEngine`.

2-1-5. In the Netlist view, click the Collapse All toolbar button  to simplify the netlist view.

2-2. Select netlist modules and view where the logic resides in the design hierarchy.

- 2-2-1. In the Netlist view, expand the `usbEngine0` module.
- 2-2-2. Select the `u4` module.
- 2-2-3. Right-click and select the **Show Hierarchy** command.
- 2-2-4. The Hierarchy view opens in the Workspace (Figure 9).

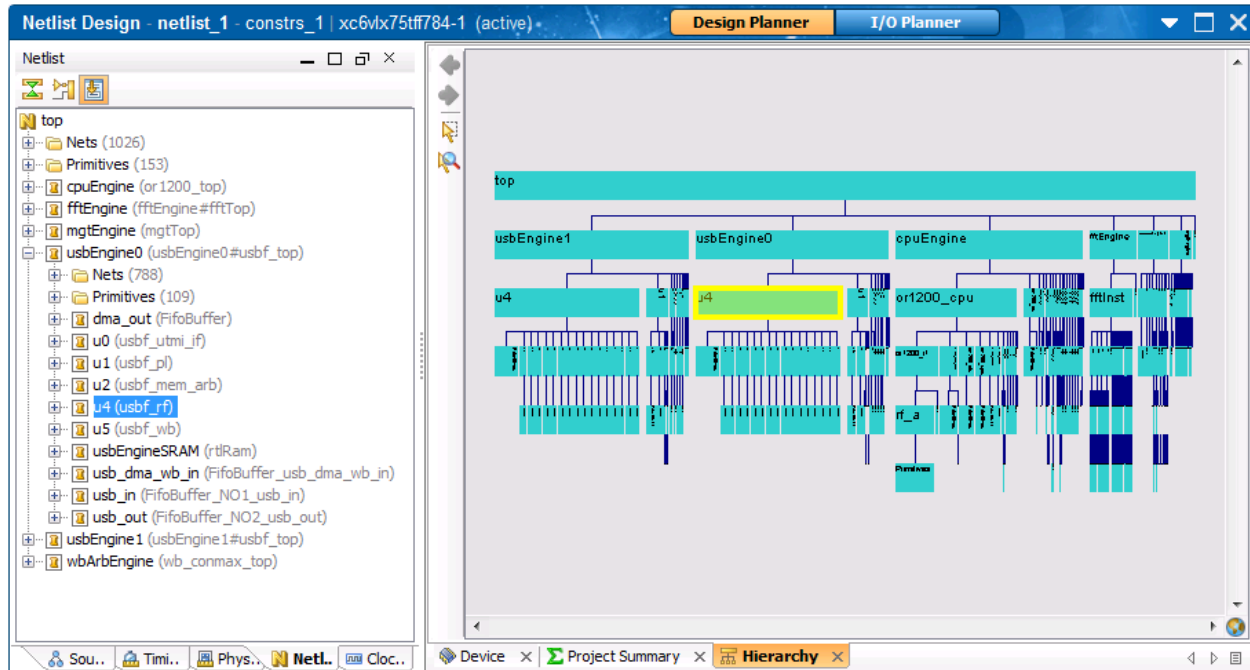



Figure 9: Displaying the Instance Hierarchy View

The Hierarchy view displays the hierarchical relationship of the modules and the relative sizes. The selected logic module displays in the Hierarchy view, which is useful to visualize the module location and relative size prior to floorplanning. You can select modules directly from this view for floorplanning. Logic selected in other views is highlighted in the Hierarchy view.

- 2-2-5. Select any module in the Hierarchy view, and notice it is selected in the Netlist view as well.

- 2-2-6. Click the Unselect All main Toolbar button,  or press **F12**.

Step 3: Displaying Design Resources Statistics

Step 3

The PlanAhead software utilization analysis provides design statistics to help determine the optimal device for the design. The tool helps the user see how the logic resources are split between modules. It is easy to explore multiple device types to determine the best overall utilization and performance estimations.

3-1. View the resource estimates of the entire design.

- 3-1-1.** In the Flow Navigator, select **Netlist Design > Resource Estimation**, or click the Resource Estimation toolbar button. 

The Resource Estimation opens in the Workspace.

- 3-1-2.** Double click on the **Resource Estimation** tab to maximize the window. Alternately, right-click on the Resource Estimation tab and select **Maximize** from the popup menu. The Resource Estimation view shows resource utilization per level of design hierarchy (Figure 10).

Note that tabs in the Workspace do not have buttons in the upper right for Maximize and the other window actions. The window actions are available via right-click menu on the tab instead.

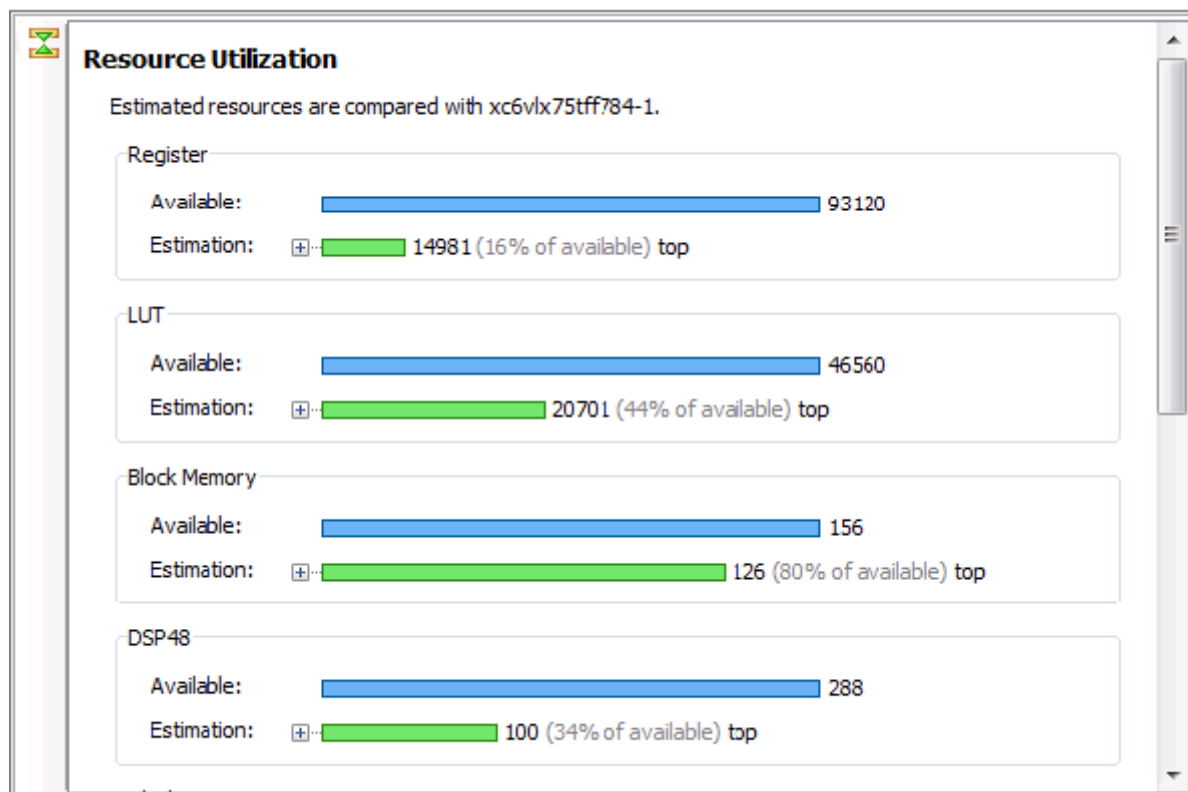



Figure 10: Resource Estimation View

- 3-1-3.** In the Resource Estimation view, click the expand widget  next to Estimation under Block Memory (Block RAM). You will see that `usbEngine0` and `usbEngine1` are the two largest consumers of Block RAM.
- 3-1-4.** Try expanding some of the other resources.

3-1-5. Select `usbEngine1` from the Block RAM Estimation section.

3-1-6. Click the **Hierarchy** tab.

Note: The `usbEngine1` is selected in the hierarchy browser as well. Selecting something in one view selects the object in other views as well.

3-1-7. Click the X button  to close the Hierarchy view.

3-1-8. Click the X button  to close the Resource Estimation view.

3-1-9. Select **Layout > Load Layout > PlanAhead Defaults** to restore the default window layout.

3-2. Explore the Resources in a more detailed view.

This is another way to see the resources in the part. The tool does not break apart resources by hierarchy. The view gives some more detailed information.

3-2-1. Select the **Physical Constraints** view from the upper left of the Main Viewing Area (Figure 11).

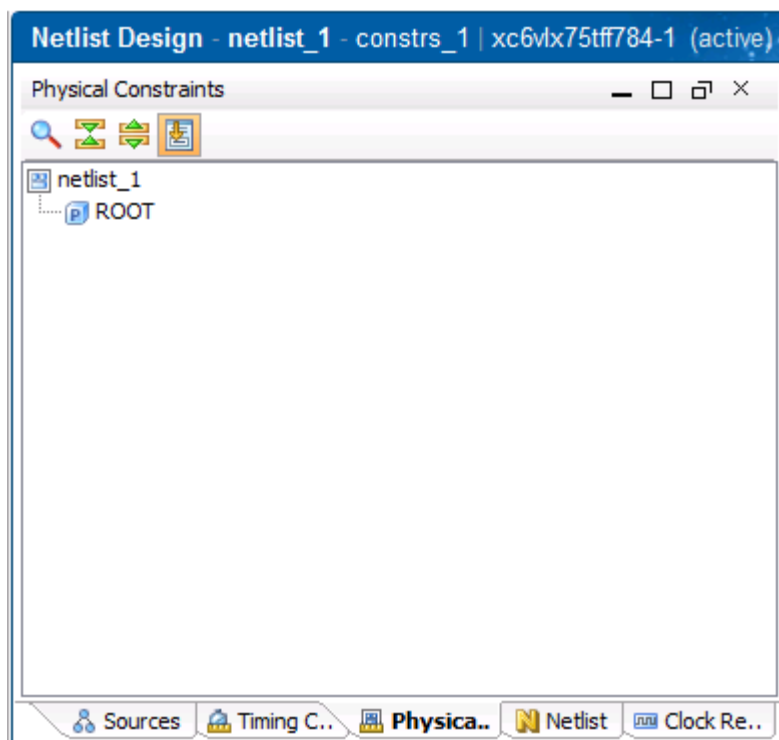


Figure 11: Physical Constraints View

3-2-2. Select the `ROOT` design

3-2-3. Select the **Pblock Properties** view.

3-2-4. Select the **Statistics** tab, if necessary.

3-2-5. View the Physical Resource Estimates displayed in the Pblock Properties view (**Figure 12**).

3-2-6. Maximize the Pblock Properties using  in the upper right corner of the Properties view..

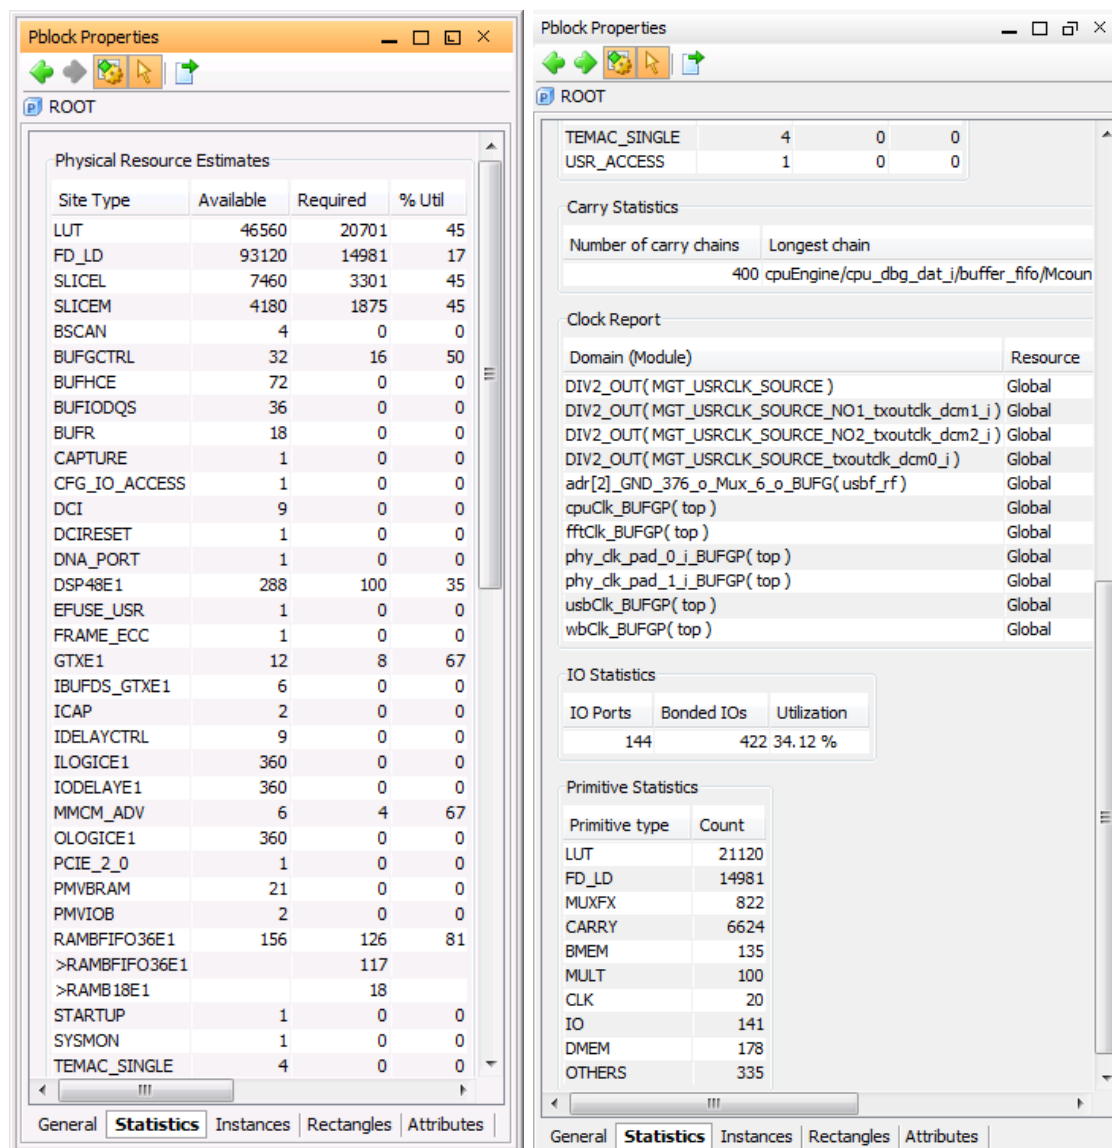


Figure 12: Viewing Design Resource Statistics

3-2-7. Scroll through the design statistics displayed in the Pblock Properties view.

Note: The Statistics tab shows the device resource utilization for each type of logic element, carry chain count, longest length, Clock Report, IO utilization, and Primitive instance and interface net counts. If this design had any RPMs, the RPM count and maximum size information would be shown also.

3-2-8. Restore the Pblock Properties .

Step 4: Running Design Rule Checks (DRC)

Step 4

Xilinx recommends running the Design Rule Checker before implementation to check for some common design issues. The ISE place and route tools have the set of sign off DRCs and take precedence over the DRCs in this tool.

4-1. Run the Design Rule Checker (DRC).

4-1-1. Select Tools > Run DRC.

The Run DRC dialog box appears (Figure 13).

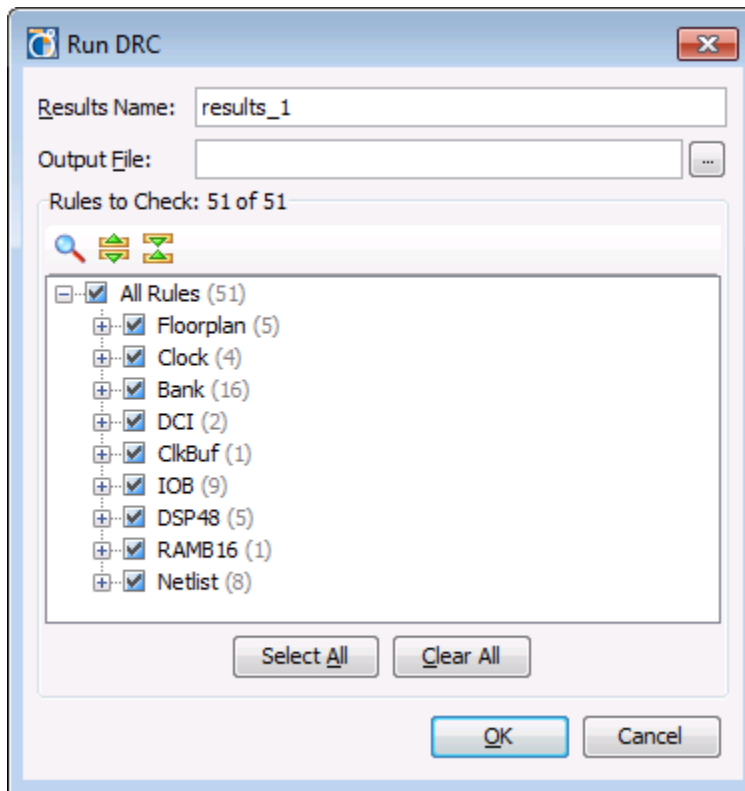


Figure 13: Running DRC

4-1-2. Click OK to run all rule checks.

The DRC Results view opens and indicates that there are several DSP48 warnings (Figure 14).

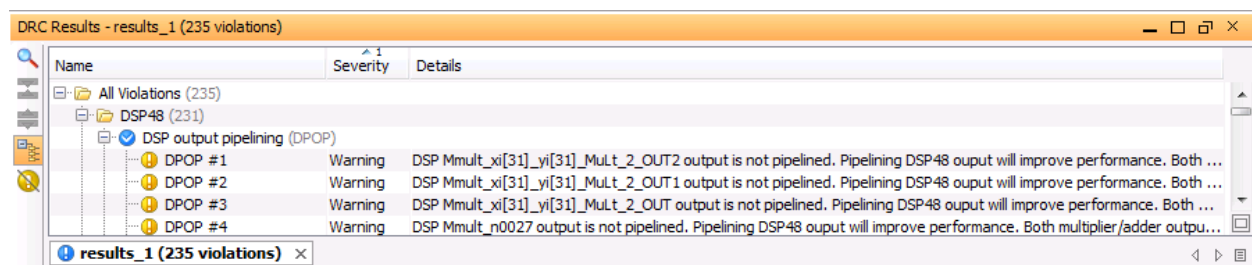


Figure 14: Design Rule Violations Window

Errors, warnings and information messages appear in the DRC Results window. Errors are indicated by a red icon. Warnings are indicated by an orange icon. Information messages are indicated by a yellow icon. Even if the DRCs issue an Error, implementation may complete successfully.

- 4-1-3.** In the DRC Results view, click the **DPOP #1** Warning.

The Violation Properties view opens and describes the violation.

- 4-1-4.** In the Violations Properties view, click `Mmult_xi[31]_yi[31]_MuLt_2_OUT2` (Figure 15).

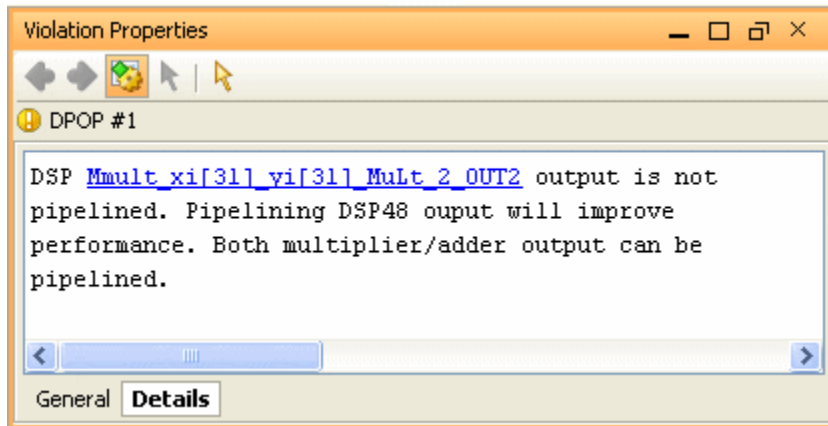


Figure 15: Violations Properties Window

- 4-1-5.** Select the **Netlist** view.

Notice that `Mmult_xi[31]_yi[31]_MuLt_2_OUT2` is selected (Figure 16).

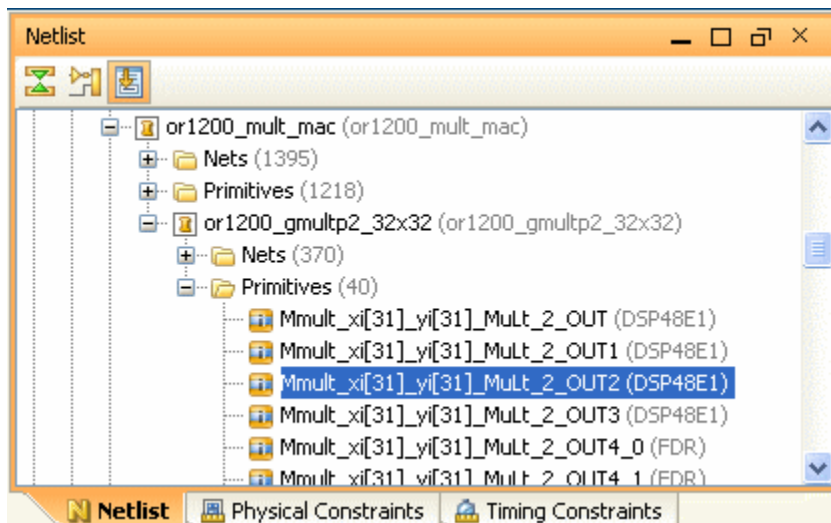


Figure 16: Instance in Netlist View

- 4-1-6.** In the DRC Results view, scroll down the list of violations.

- 4-1-7.** Close the DRC Results view by clicking the X button in the tab.

Step 5: Performing Timing Analysis

Step 5

Before running implementation it can be useful to determine the feasibility of the design's timing constraints to perform an early static timing estimation, including estimated route delays. These timing numbers are estimates of what will happen in the FPGA. The implementation step is the only way to get sign-off timing numbers. That information only shows up when importing a run. This step will show what can be done to investigate timing before synthesis. Keep in mind the Report Timing and the Slack Histogram commands do not show sign-off timing numbers.

5-1. Analyze timing end points in the Slack Histogram.

The tool will bin the end points based on slack and present a histogram. It is possible to visualize how many end points are tight on timing versus those that have a margin.

5-1-1. Select **Tools > Slack Histogram**.

5-1-2. Change the Number of bins to **20**.

The Generate Slack Histogram for Endpoints dialog box should look like the one in Figure 17.

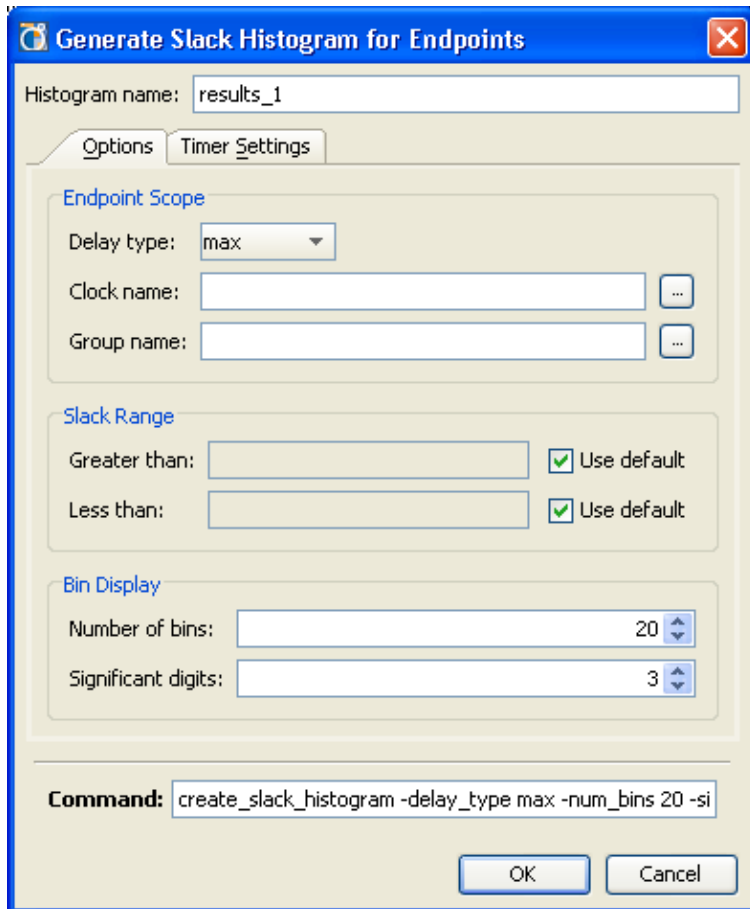


Figure 17: The Generate Slack Histogram for Endpoints Dialog Box

5-1-3. Click the Timer Settings tab.

5-1-4. Inspect the settings.

Note: The Timer Settings tab lets you change how the tool accounts for route delay. The timer can estimate route delay or assume there is no interconnect routing delay.

5-1-5. Click **OK**.

A histogram will display showing binned end points (Figure 18).

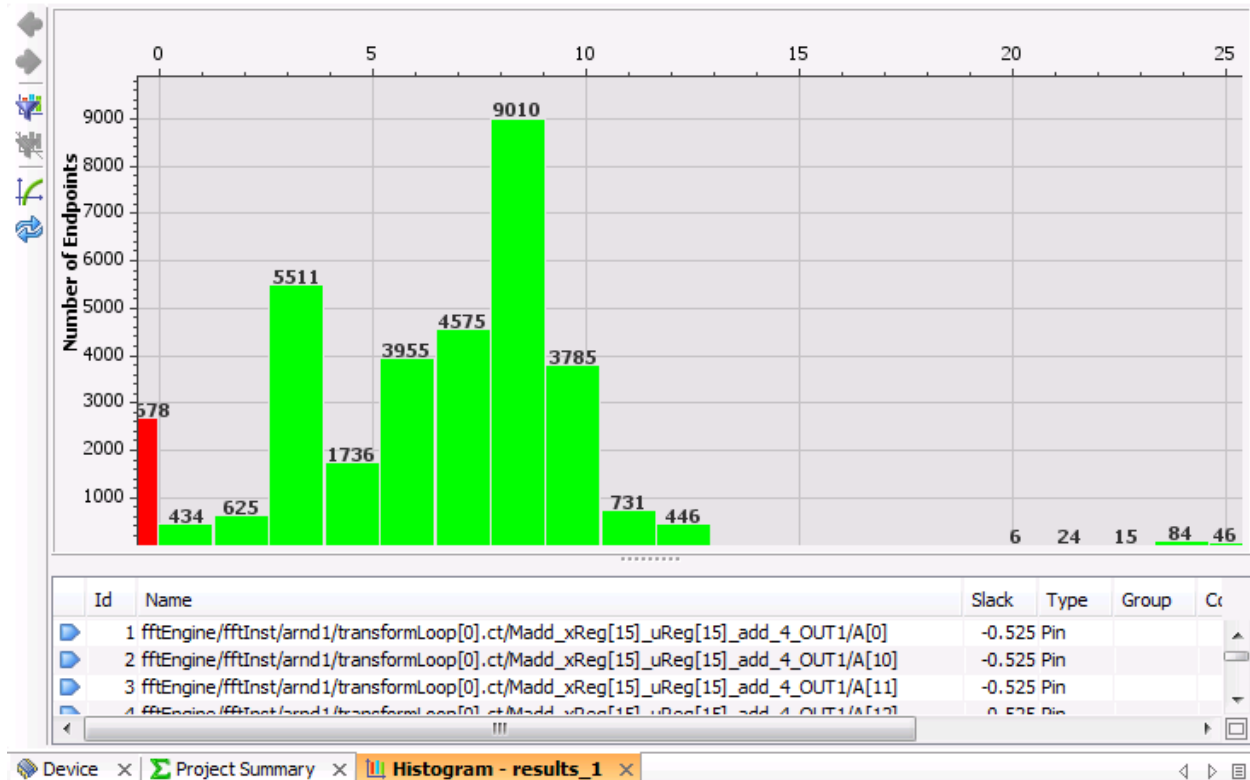


Figure 18: Slack Histogram

Notice the failing end points are displayed in the red bin on the left side of the slack 0 column separator. These end points are expected to have timing problems.

5-1-6. Click on various bins.

Note: The end points in the lower view filter as the bins are selected. The slack range is also updated.

5-1-7. Select the left most bin, which is the bin with endpoints expected to fail timing.**5-1-8.** Inspect the end points.

Note: Most of the timing end points are Block RAMs in the fftEngine block.

5-1-9. Select an instance from the filtered histogram report. It cross selects in the netlist view.**5-1-10.** Click the X button to close the histogram

5-2. Run Timing Analysis and analyze the initial results and information in the Timing Results view.

5-2-1. Select **Tools > Report Timing**.

The Report Timing dialog box opens (Figure 19) to the Targets tab, which enables you to specify timing start and end points.

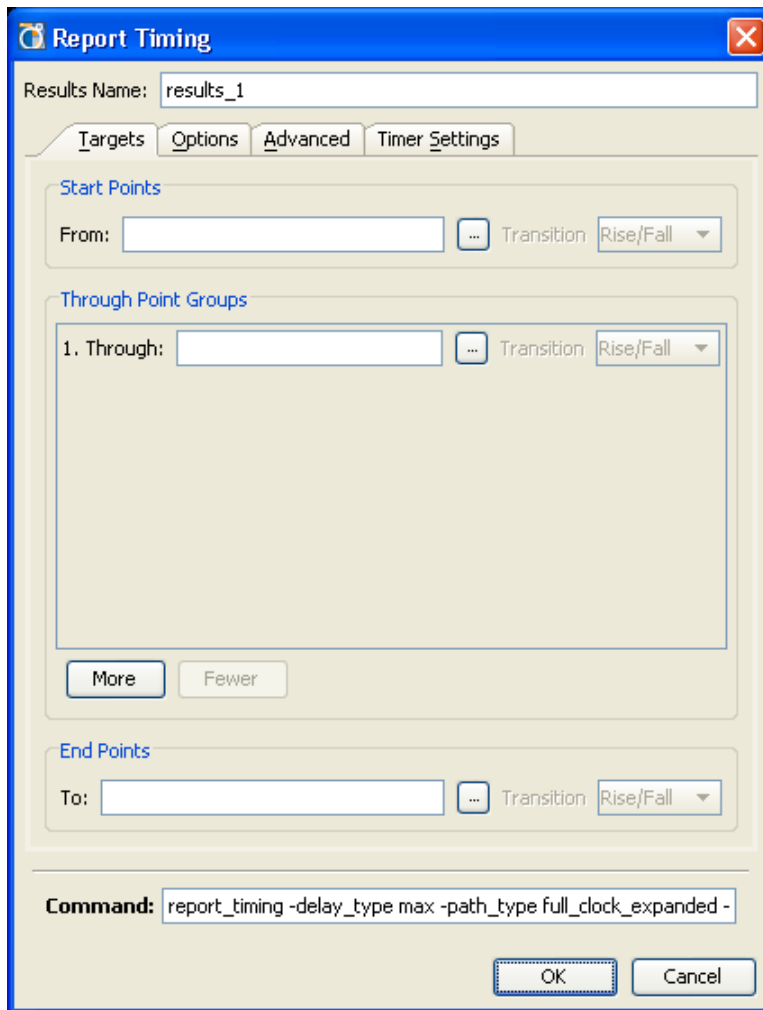
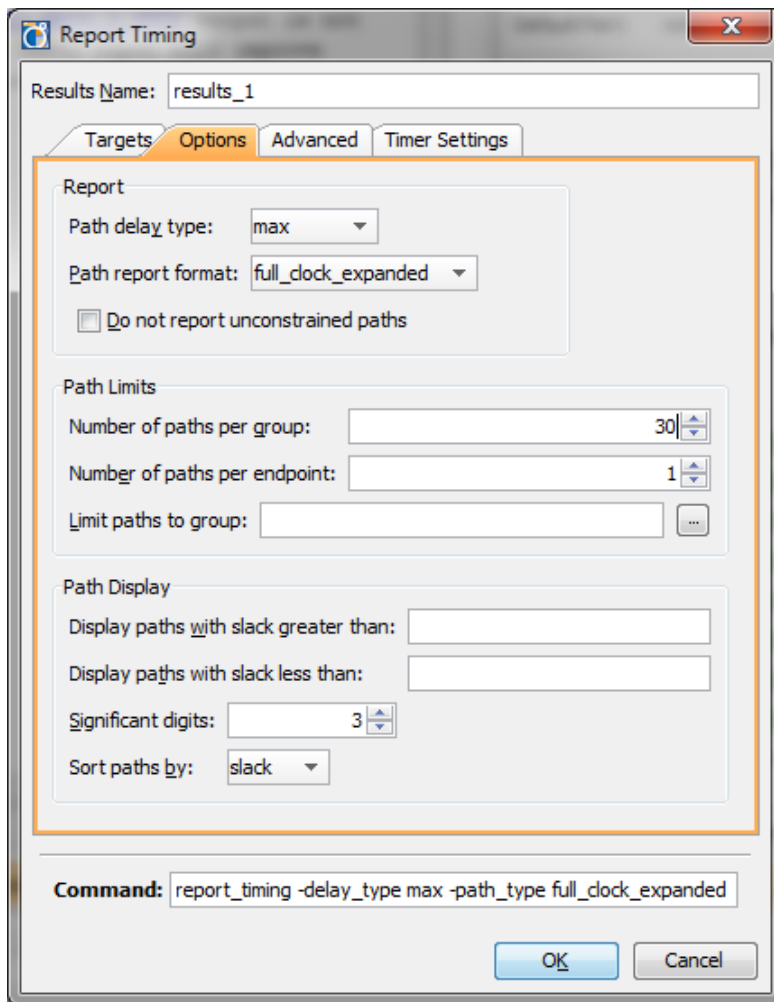


Figure 19: Running Timing Analysis.

5-2-2. Select the Options tab (Figure 20).**Figure 20: Report Timing Options Tab****5-2-3.** In the Number of paths per group field, type 30.**5-2-4.** Click the **Advanced** and **Timer Settings** and inspect the tabs. Do not change anything.**5-2-5.** Click **OK** to run analysis.

The Timing Results view opens (Figure 21).

Name	Type	Slack	From	To
Path 1	Setup	-0.525	fftEngine/fftInst/arnd1/transformLoop[0].ct/Mmult_n0027/P[18]	fftEngine/fftInst/arnd1/transformLoop[0].ct/Madd_xReg[15]_uReg[15]_add_4_OUT1/A[0]
Path 2	Setup	-0.525	fftEngine/fftInst/arnd1/transformLoop[0].ct/Mmult_n0027/P[28]	fftEngine/fftInst/arnd1/transformLoop[0].ct/Madd_xReg[15]_uReg[15]_add_4_OUT1/A[10]
Path 3	Setup	-0.525	fftEngine/fftInst/arnd1/transformLoop[0].ct/Mmult_n0027/P[29]	fftEngine/fftInst/arnd1/transformLoop[0].ct/Madd_xReg[15]_uReg[15]_add_4_OUT1/A[11]
Path 4	Setup	-0.525	fftEngine/fftInst/arnd1/transformLoop[0].ct/Mmult_n0027/P[30]	fftEngine/fftInst/arnd1/transformLoop[0].ct/Madd_xReg[15]_uReg[15]_add_4_OUT1/A[12]
Path 5	Setup	-0.525	fftEngine/fftInst/arnd1/transformLoop[0].ct/Mmult_n0027/P[31]	fftEngine/fftInst/arnd1/transformLoop[0].ct/Madd_xReg[15]_uReg[15]_add_4_OUT1/A[13]

Figure 21: Analyzing Timing Analysis Results

The list of paths display in the report in the Timing Results view. The report shows Path Type, Slack, Source, Destination, Total Delay, Logic Delay, Net Delay Percentage, Stages of logic, start clock, and destination clock. Failing paths appear in **red**.

5-2-6. Maximize the Timing Results view.

5-2-7. Scroll down the list of paths.

Note: The From and To values are in one of the `fftEngine` modules.

5-2-8. Click the **To** column header *twice* to sort the list by Source. The report is now reverse sorted by To column values.

Note: You can sort all of the table style views in the PlanAhead software in the same way.

- To perform a reverse sort, click the column header again.
- To perform a secondary sort, press the **Ctrl** key and select another column header.

5-2-9. Restore the Timing Results view.

5-2-10. Close the Timing Results view.

Step 6: Modifying or Creating Timing Constraints

Step 6

PlanAhead enables constraint creation and modification in several ways. To edit the UCF file directly in the text editor, double-clicking on the file in the Sources view. Alternately the GUI provides a specialized UCF interface, described in this step.

6-1. Modify the Timing Constraints to reduce delay on fftEngine.

6-1-1. Select the **Timing Constraints** view tab grouped near the Netlist view.

6-1-2. Expand the Clk period >Timespec period folders.

6-1-3. Select the TIMESPEC TS_fftClk (Figure 22).

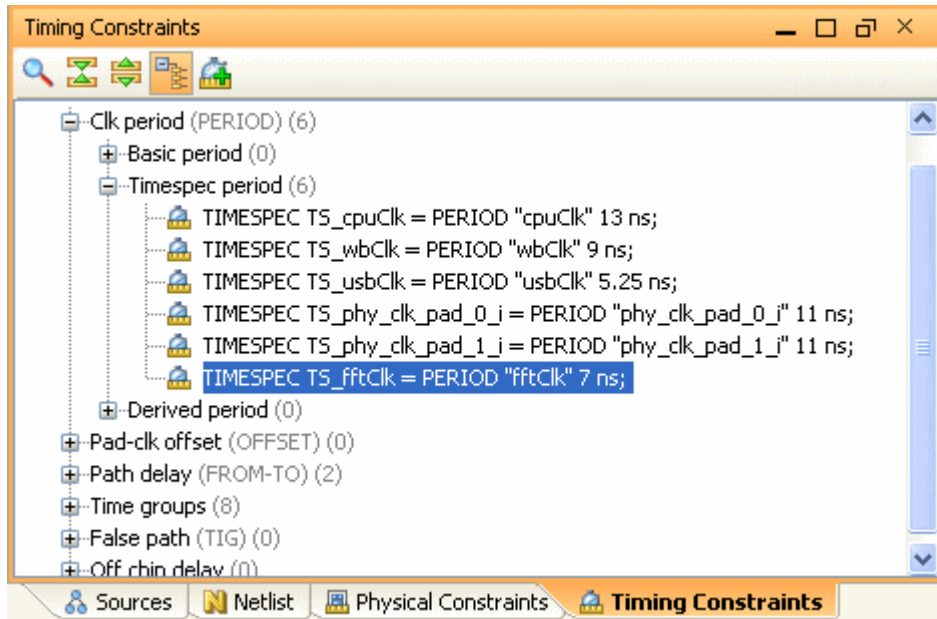


Figure 22: Selecting Timing Constraints to review Values

6-1-4. In the Timing Constraint Properties view, change the Period field value from 7 to 8. (Figure 23)

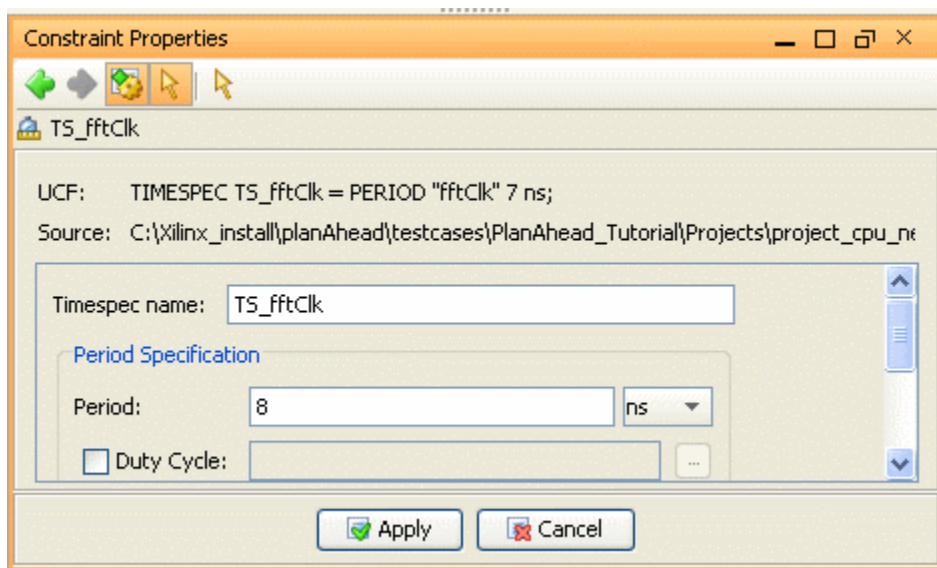



Figure 23: Modifying a Period timing constraint

6-1-5. Click **Apply** to accept the changes.

6-1-6. In the Timing Constraints view, turn off the Group by type button  to view all the design timing constraints in a list instead of by category (Figure 24).

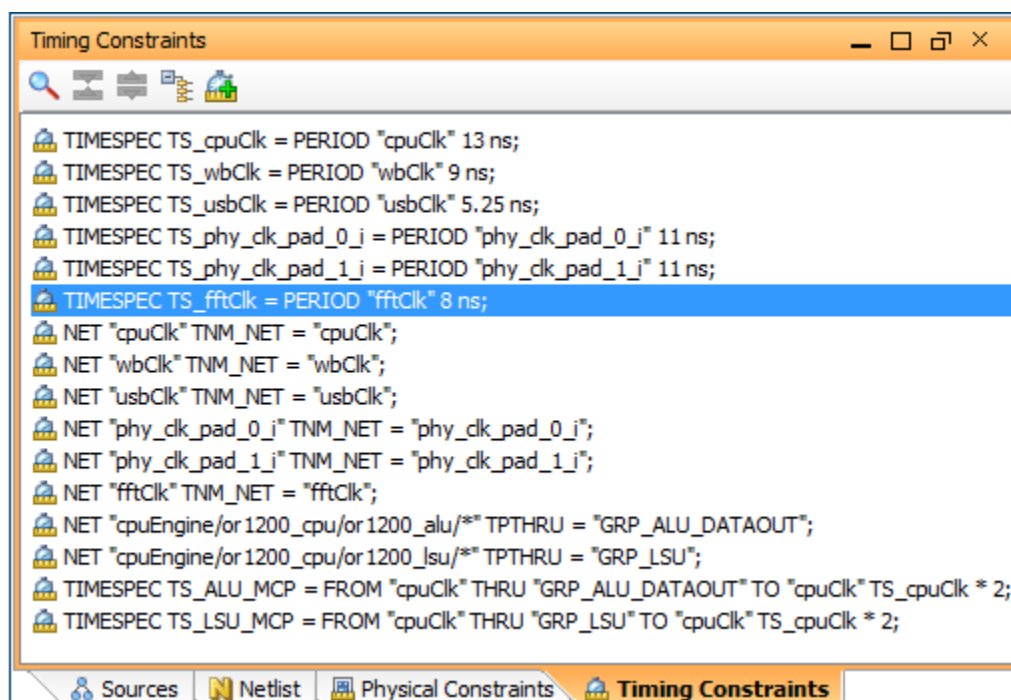



Figure 24: Viewing a List of all Timing Constraints Defined

Note: If needed, it is possible to remove timing constraints. To remove timing constraints from the design, select the constraint, right-click and select the **Delete** popup command. Deleting constraints is outside the scope of this tutorial.

6-2. Create a new Timing Constraint.

It is possible to define new timing constraints for clocks, false paths, and others from inside the tool. This step will show how but the constraint will not be saved.

- 6-2-1.** Click the New Timing Constraint button  to open the New Timing Constraint dialog box (Figure 25).

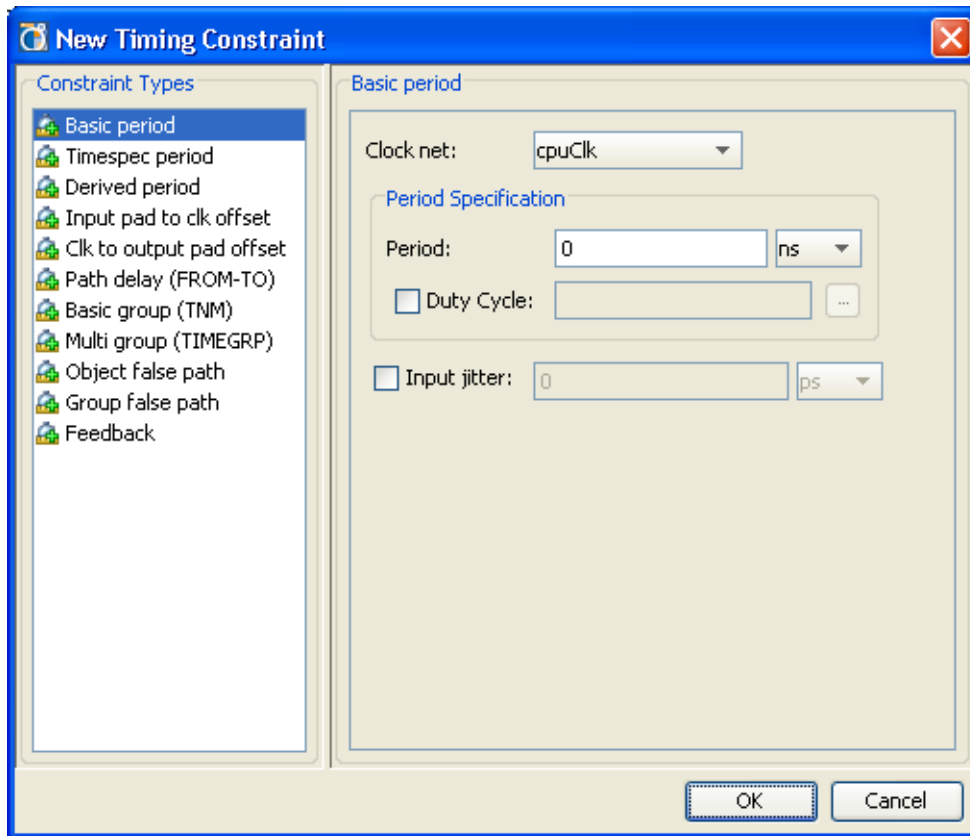



Figure 25: New Timing Constraint Dialog Box

- 6-2-2.** Explore some of the Constraint Types.
- 6-2-3.** Click **Cancel** to close the New Timing Constraint dialog box.

6-3. Rerun Timing Analysis to see what changes with the new PERIOD on fftCLK

- 6-3-1.** In the Flow Navigator, select **Report Timing** again to rerun timing analysis with the new PERIOD value.
- 6-3-2.** Click **OK** to launch the run.
- 6-3-3.** When the Timing Results view appears, select **Path 1** in the list.
- 6-3-4.** Maximize the Path Properties view (Figure 26) using the Maximize button .

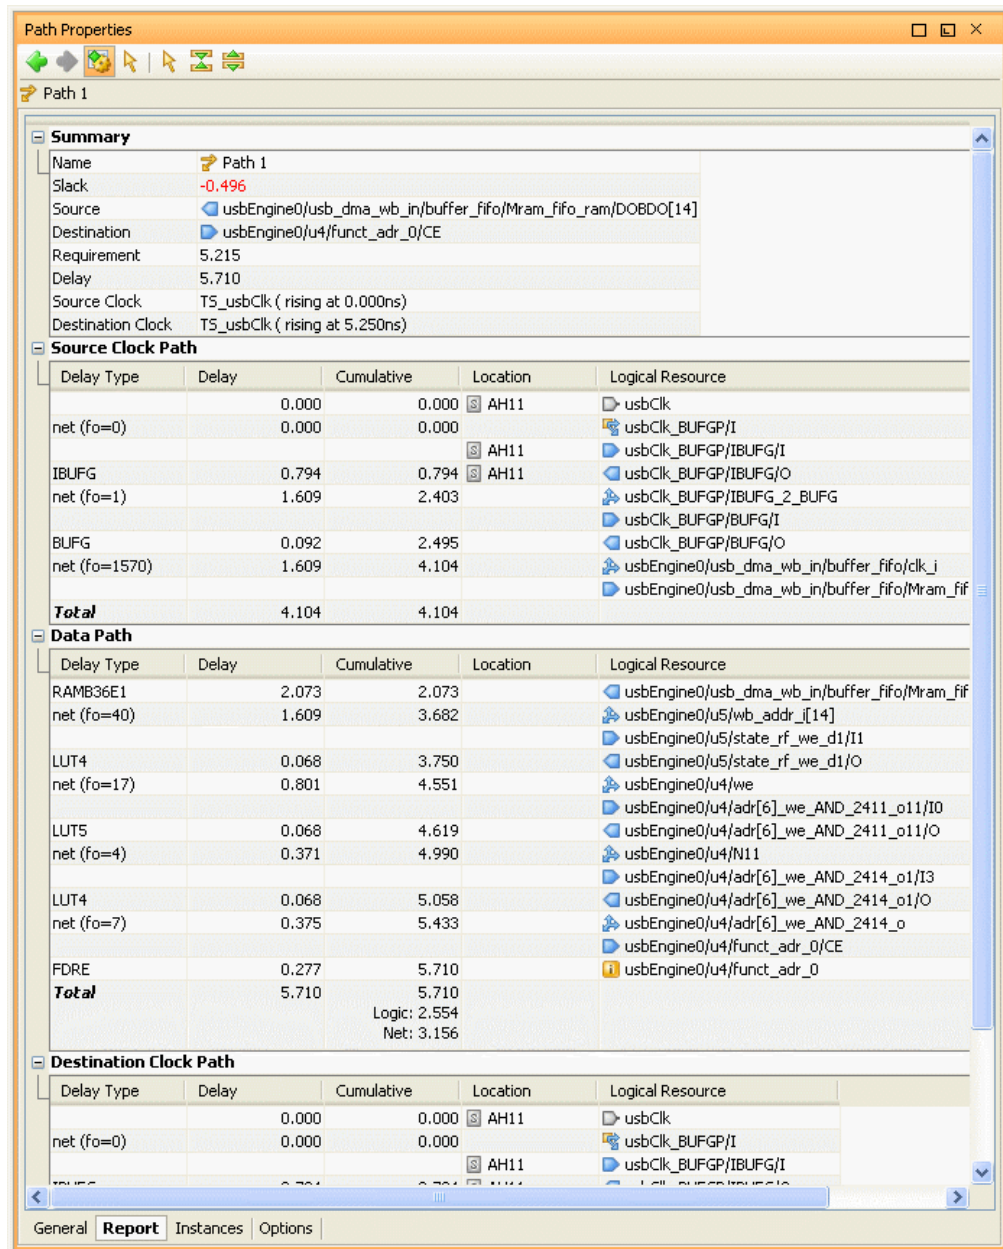



Figure 26: Viewing the Path Properties

Note: The paths have changed to reflect the new timing constraint for fftClk even though no command was issued to save the new constraints to disk. Timing is run against the constraints in memory. The tool shows the path for the Source Clock, the Destination Clock, as well as the critical logic. All of the logic objects in the path and their associated delays are shown the Path Properties report.

- 6-3-5.** In the Path Properties view, select the Restore button  to return the view to the original location.

Step 7: Exploring Logic in the Schematic

Step 7

To explore logic in the Schematic view, you can experiment with the schematic commands for traversing and expanding logic. For example, you can selectively remove logic from the schematic and traverse the logic modules.

7-1. View timing paths in the schematic.

7-1-1. Select **Path 1** in the Timing Results view.

7-1-2. Right-click and select **Schematic**.

7-1-3. Click Unselect All  or press **F12**.

Notice that the path logic is shown in the Schematic view (Figure 27).

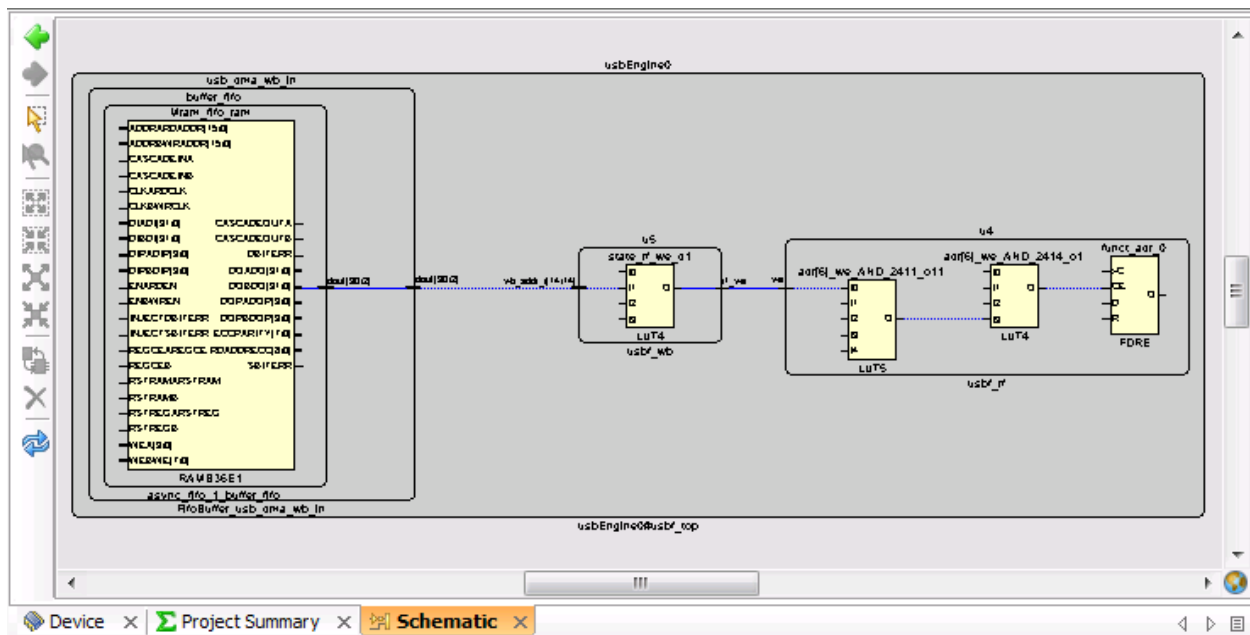


Figure 27: Viewing Timing Path Logic in the Schematic

Notice that the levels of hierarchy are drawn with concentric rectangles. It is very easy to identify the logic modules associated with critical path logic.

7-1-4. Close the Schematic view by clicking the X button in the Schematic tab.

7-1-5. Use the mouse and the **Shift** key to select all of the paths in the Timing Results view that have a *From* value beginning with *usbEngine0/...*

7-1-6. Right-click and select **Schematic**.

All of the logic associated with each selected path displays and is selected in the Schematic view (Figure 28).

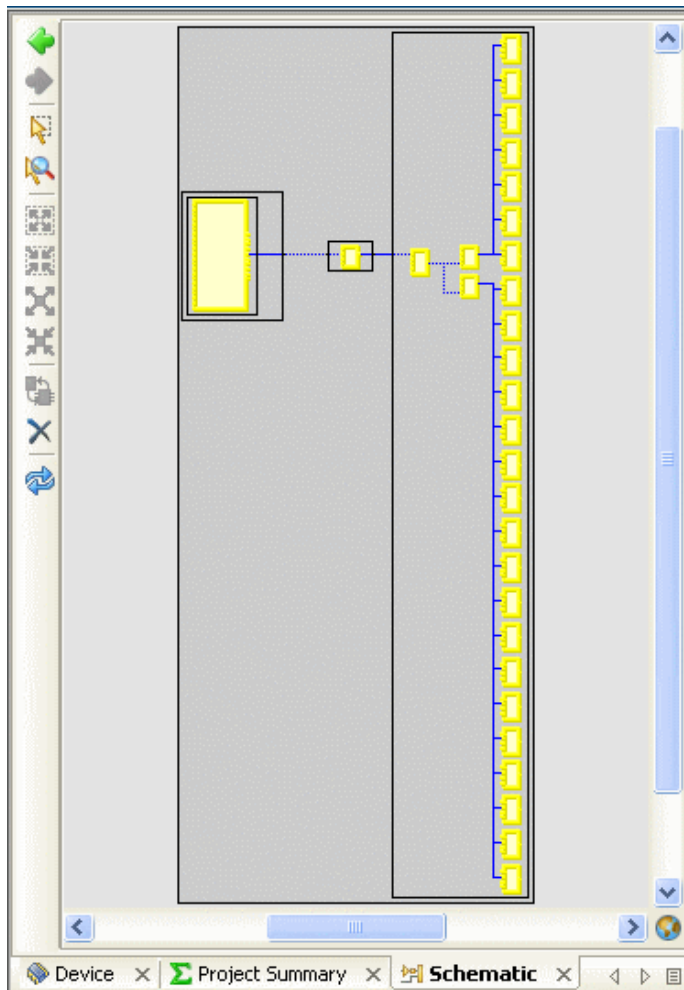



Figure 28: Viewing Multiple Timing Paths in the Schematic

- 7-1-7. In the Netlist view, click the Collapse All toolbar button .
- 7-1-8. With the group of paths still selected and the cursor in the Schematic view, right-click and select **Select Primitive Parents**.

The three modules with the path logic are highlighted in the Netlist view.

7-2. Inspect where the critical hierarchy is in the design hierarchy.

- 7-2-1.** Select the Show Hierarchy popup menu command or press **F6** .
- 7-2-2.** Use Zoom Area on the left side around `usbEngine0` to see the critical hierarchies.

Hint: To activate the Zoom Area mouse stroke, move the cursor to be just outside the top left corner of the driver. Hold down the left mouse button and drag the mouse to the bottom right corner of the driver. Release the mouse. Repeat as needed to see the three modules with the path logic highlighted in the Hierarchy view (Figure 29).

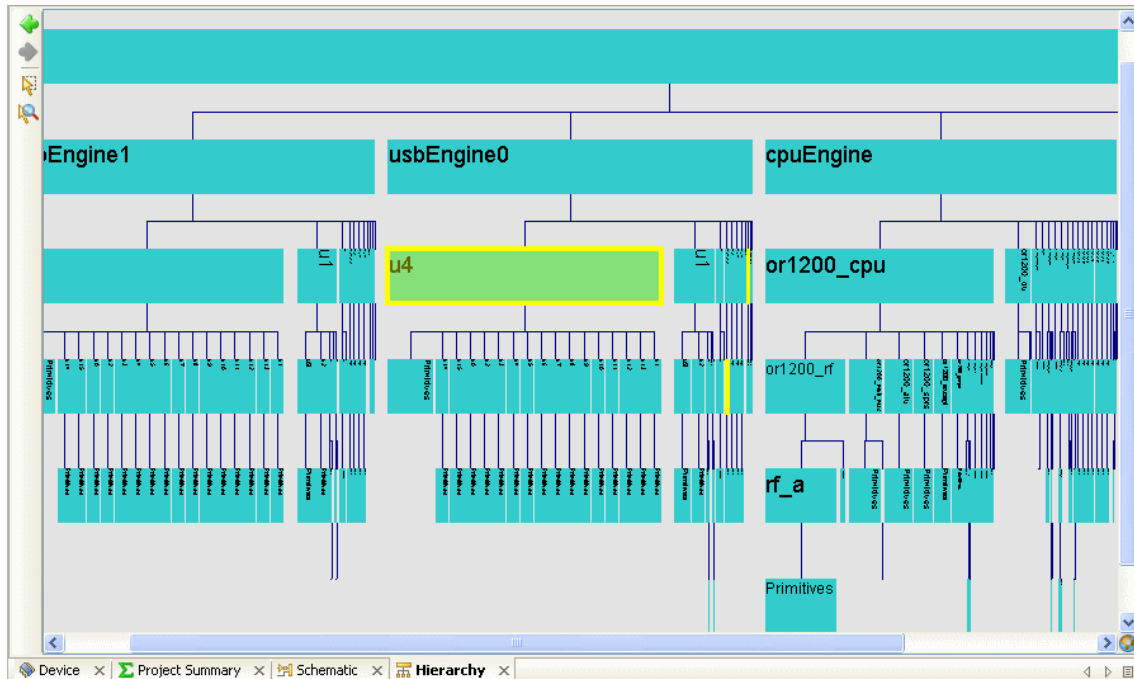



Figure 29: Viewing Selected Logic in the Hierarchy View

- 7-2-3.** In the Hierarchy view tab, click **X** to close the view.
- 7-2-4.** Use the Zoom Area mouse stroke to zoom in on the single instance inside the highlighted module on the left in the Schematic view
- 7-2-5.** Select the **RAMB36E1**.
- 7-2-6.** Click the Collapse Outside button  (Figure 30).

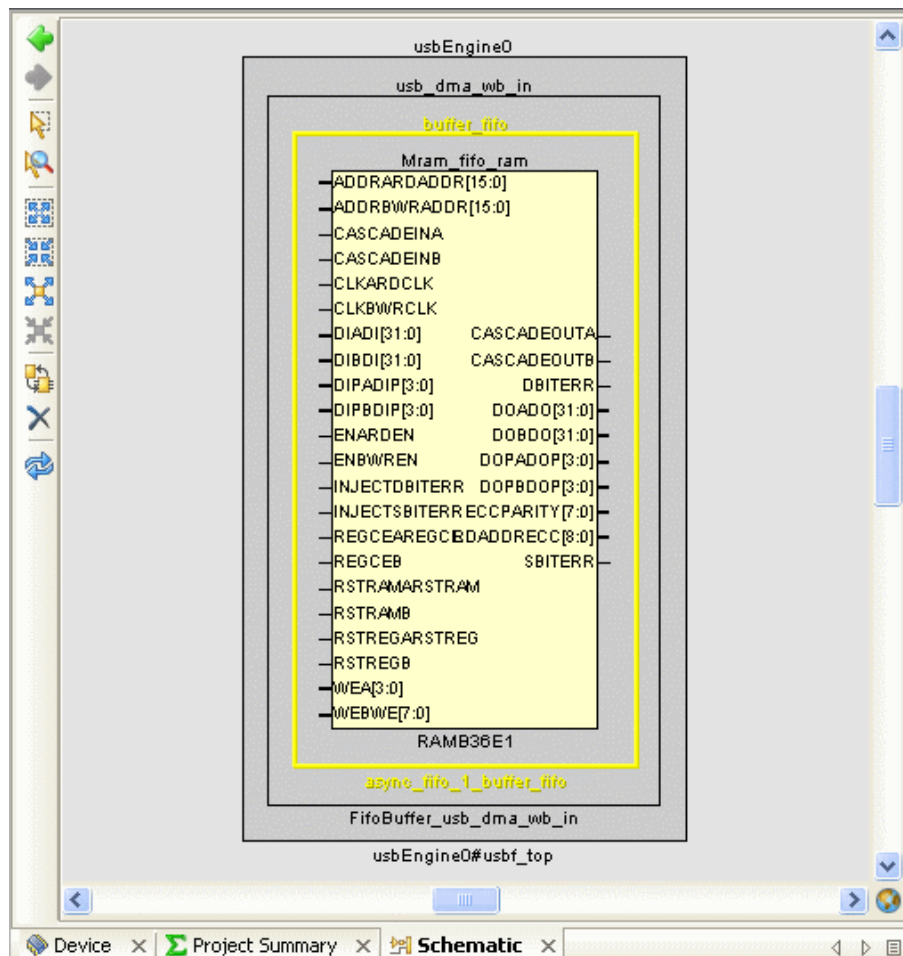


Figure 30: Critical Path Source

- 7-2-7.** Double-click the **ADDRARDADDR[15:0]** pin (in the top left of the Block Ram) and notice that the logic connected to it is expanded (Figure 31).

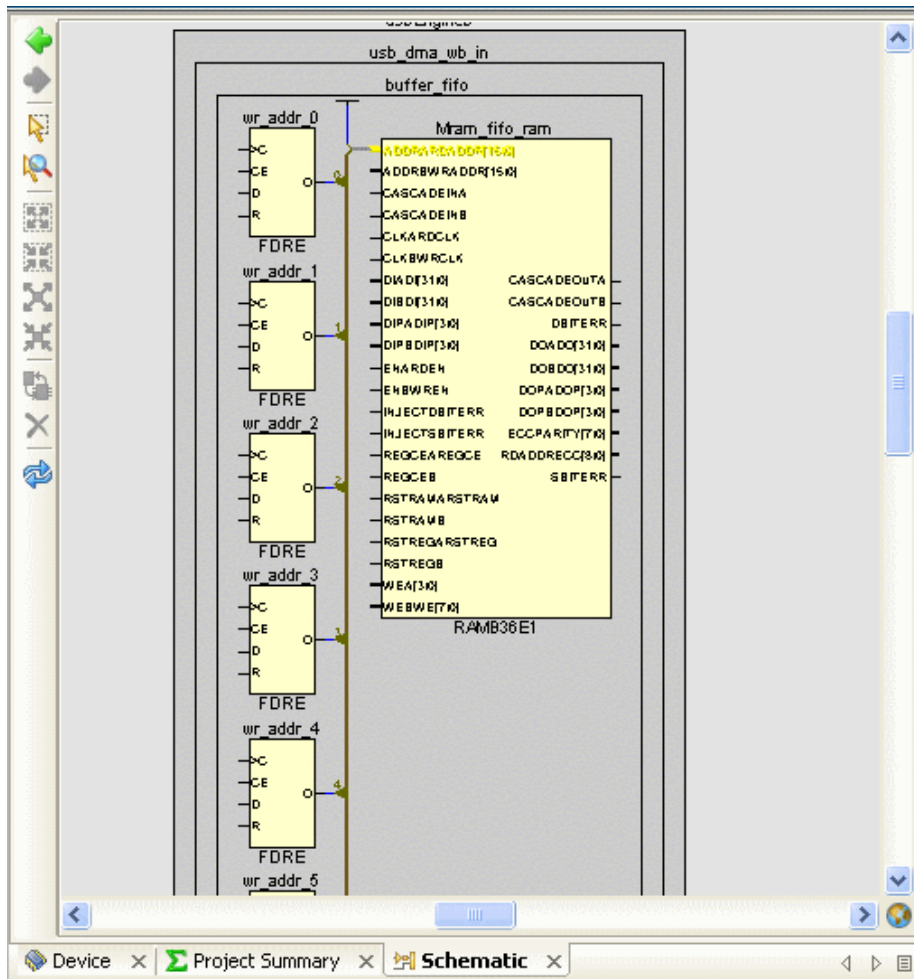


Figure 31: Interactively Expanding Logic in the Schematic View


7-2-8. Double-click newly expanded top instance `wr_addr_0`. This adds the logic to which it connects to the schematic.

7-2-9. In the Schematic view, select the Previous schematic button .

You can use the Previous schematic and Next schematic toolbar buttons to browse the various views displayed in the Schematic view. This enables you to toggle the various levels of schematic expansion.

Note: The **Edit > Undo** command is *not* applicable to the schematic view.

7-2-10. Select the smaller `buffer_fifo` module hierarchical rectangle containing the `RAMB36E1` instance.

7-2-11. In the Schematic view, click the Expand Inside button .

7-2-12. Zoom Fit in the schematic (Figure 32).

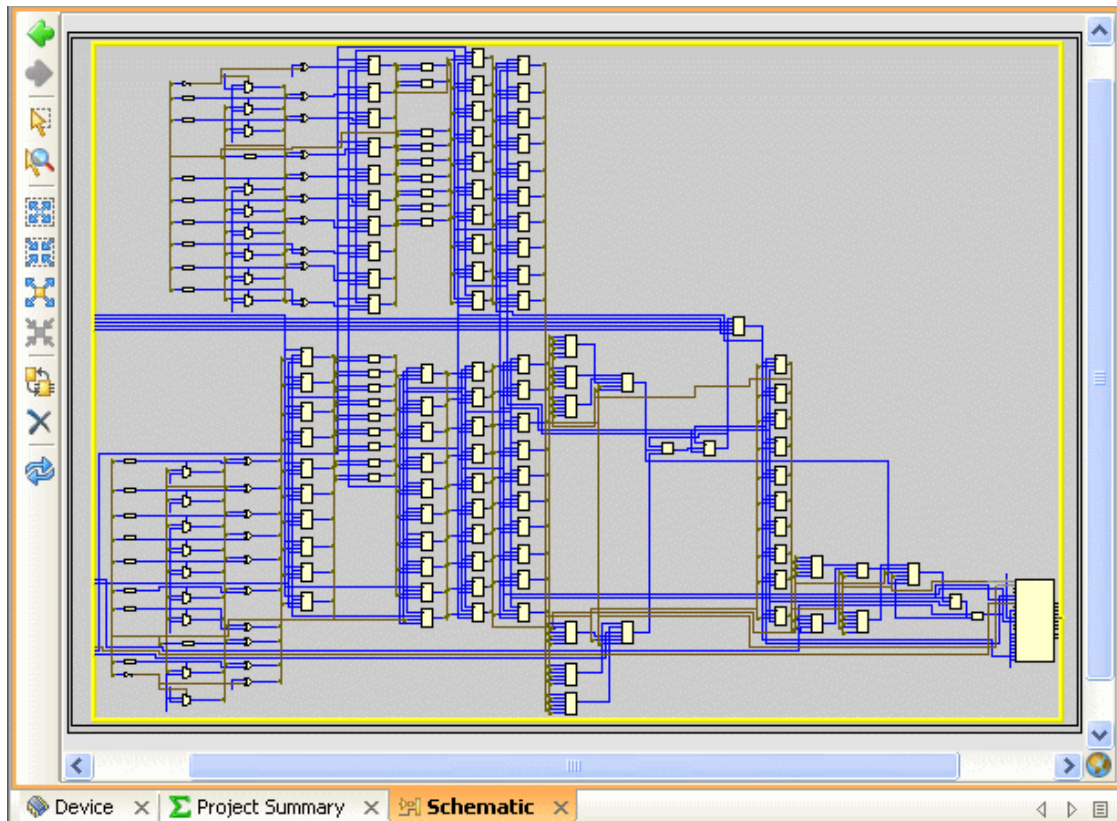




Figure 32: Expanding Logic Inside of Schematic Modules.

7-2-13. Click the Select Area toolbar button  and draw a rectangle around some of the logic in the Schematic view.

7-2-14. Click the Remove selected elements from schematic toolbar button . Notice that some logic is no longer displayed.

Note: This tutorial covers only a subset of the Schematic view commands and options for traversing the logic.

7-2-15. Use the  on the right side of the Netlist Design bar to close down the Netlist Design

7-2-16. If prompted click **OK** to close the Netlist Design.

7-2-17. When the tool prompts you to Save Netlist Design, click **No**.


In the next steps Place and Route will run with the original 7ns constraint on fftClk.

Step 8: Implementing the Design

Step 8

8-1. Review the Implementation tools actions on the design.

8-1-1. If the Sources view is hidden from view, select **Window > Sources** to display it.

8-1-2. In the Sources view, click Expand All  to see all source files (Figure 33).

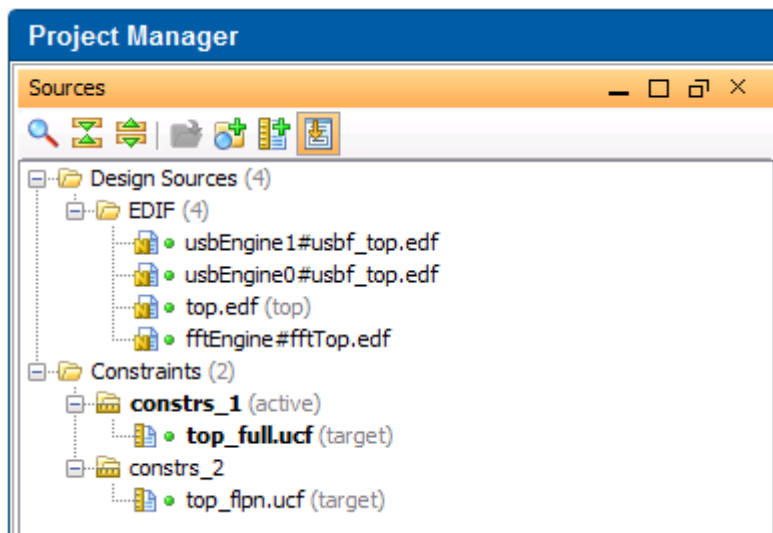



Figure 33: Expanded Sources View

When running the implementation tools, PlanAhead uses the *active* constraint file by default. Make sure that **constrs_1** using **top_full.ucf** is active. If Netlist Design or Implemented Design are open with changes, those changes will be used instead of the UCF on disk.

8-1-3. Double click on **top_full.ucf** to view the text.

8-1-4. Ensure TS_ffcClk looks as follows

```
TIMESPEC TS_ffcClk = PERIOD "fftClk" 7 ns;
```

8-1-5. Use  to close the UCF. Save changes if needed.

8-1-6. In the Flow Navigator, click the **Implement** button to start implementation (Figure 34).



Figure 34: Start Implementation.

This launches the ISE Place and Route tools; specifically **NGDBuild**, **Map**, **PAR**, **Trace**, and **XDL**. The process will take about 60 minutes on a fast machine.

Leave the tool alone while implementation runs. The status bar in the upper right reflects the progress (Figure 35).



Figure 35: Implementation Bar

When implementation finishes, the tool will show an Implementation Completed dialog box (Figure 36).

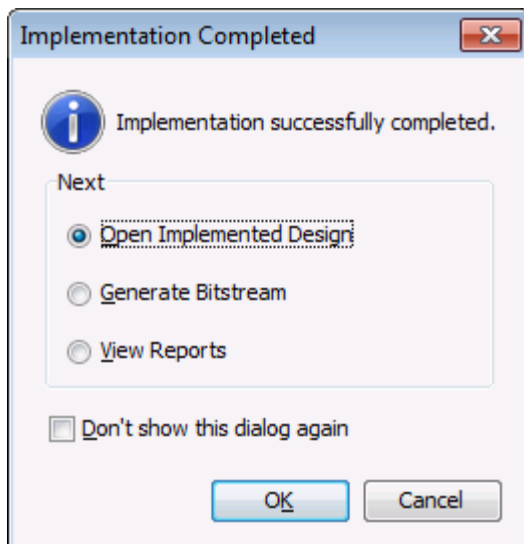



Figure 36: Implementation Completed

8-1-7. Click the **Open Implemented Design** radio button.

8-1-8. Click **OK**.

The tool reads the place and route files to show where each instance was placed and what `trce` is reporting for timing (Figure 37). To re-open the implemented design later, click the

Implemented Design button in the Flow Navigator



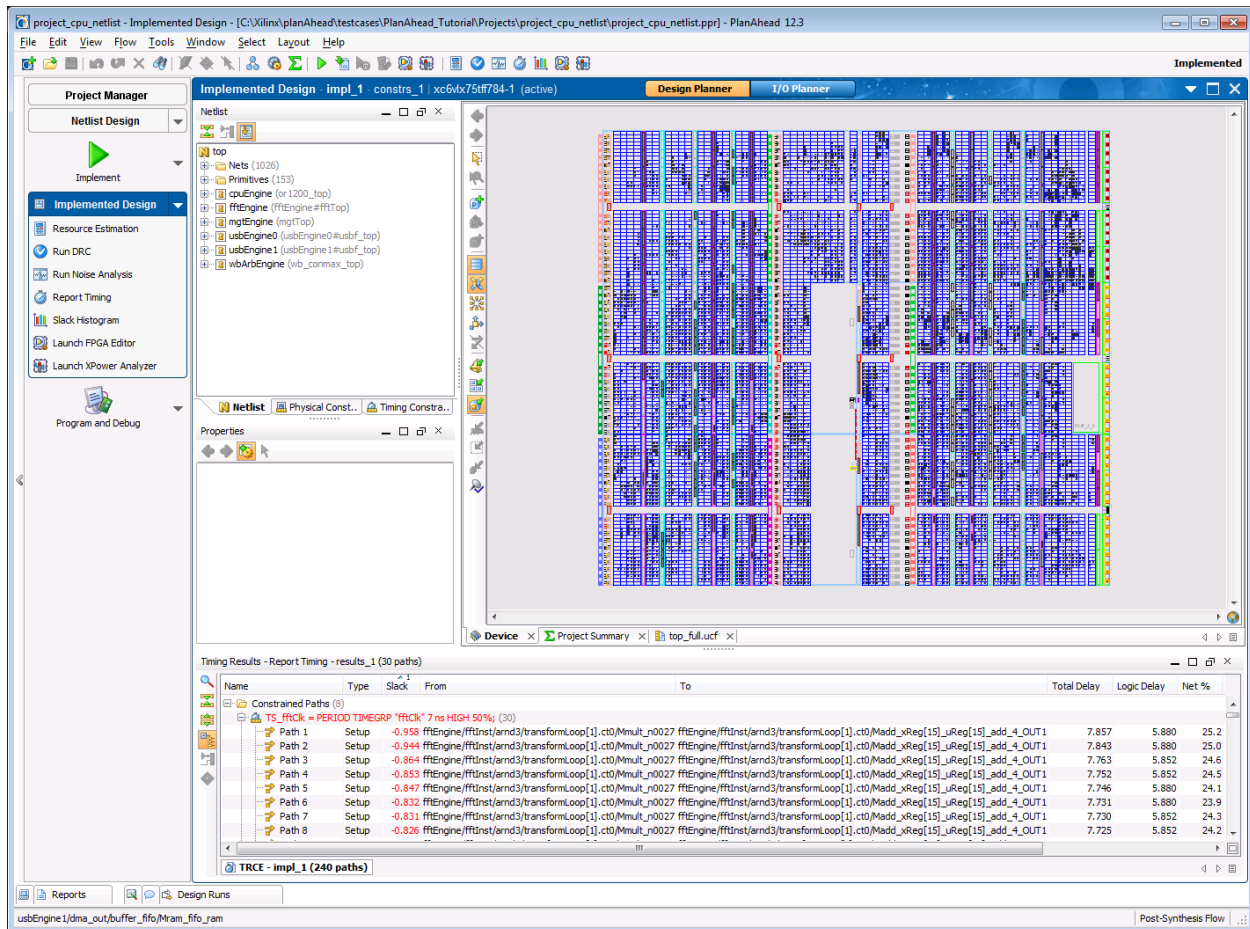


Figure 37: The Implemented Design

8-1-9. Click the **Compilation Messages** tab to display the Compilation Messages view.

8-1-10. If needed, click the expand widget by Place and Route to see the messages generated at this step (Figure 38).


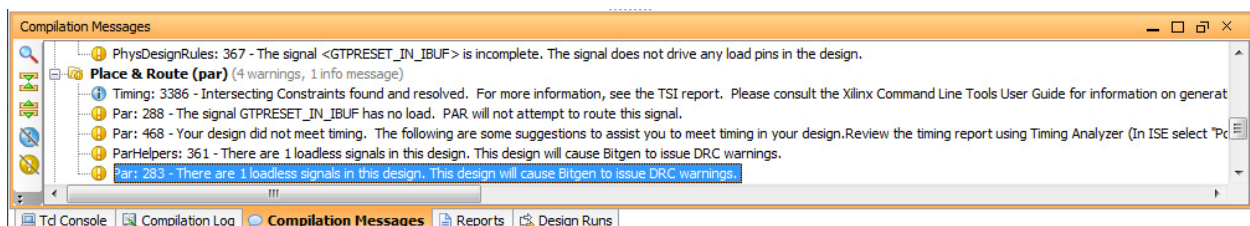


Figure 38: Compilation Messages

Note: The Compilation Messages view collects all information, warning, and error messages generated by the implementation tools. Click the blue exclamation circle button in the local toolbar to hide Information messages. Click the yellow exclamation circle button to hide Warnings.

8-1-11. Click the **Reports** tab to display the Reports view (Figure 39).

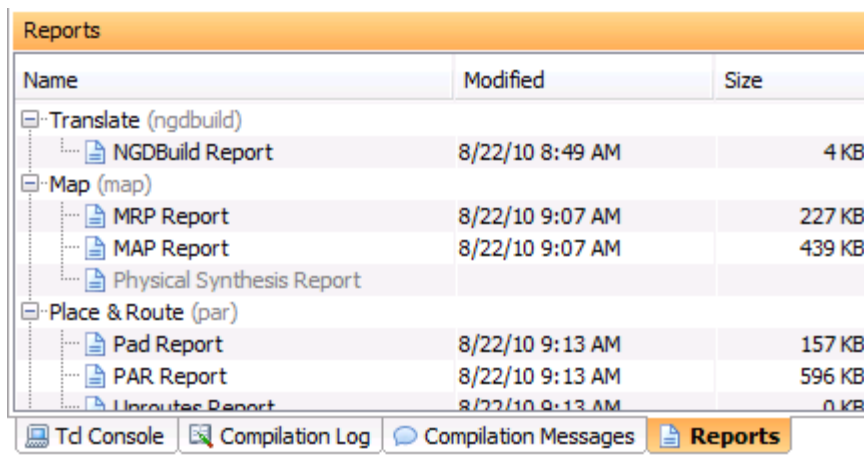

The screenshot shows the 'Reports' window in the ISE software. It contains a table with three columns: 'Name', 'Modified', and 'Size'. The table lists reports organized into three categories: 'Translate (ngdbuild)', 'Map (map)', and 'Place & Route (par)'. Each category has a folder icon and a list of report files. At the bottom of the window, there are four tabs: 'Tcl Console', 'Compilation Log', 'Compilation Messages', and 'Reports' (which is currently selected and highlighted in orange).

Name	Modified	Size
Translate (ngdbuild)		
NGDBuild Report	8/22/10 8:49 AM	4 KB
Map (map)		
MRP Report	8/22/10 9:07 AM	227 KB
MAP Report	8/22/10 9:07 AM	439 KB
Physical Synthesis Report		
Place & Route (par)		
Pad Report	8/22/10 9:13 AM	157 KB
PAR Report	8/22/10 9:13 AM	596 KB
Unroutes Report	8/22/10 9:13 AM	0 KB

Figure 39: Viewing ISE Report files

8-1-12. Double-click on any one of the reports to view the report.

8-1-13. Close the report file.

Step 9: Analyzing the Timing Results

Step 9

You can analyze timing results from the implementation to drive the floorplanning effort. You can also use the path sorting and selection techniques available in the Timing Results view with the imported TRACE report data.

9-1. Explore the Implementation timing results.

9-1-1. Double-click in the empty space on the top title bar labeled **Implemented Design – impl_1** to maximize the work area.

9-1-2. In the Timing Results view, select **Path 1** (Figure).

9-1-3. Right-click and select the **Mark** popup command.

Name	Type	Slack	From	To	Total Delay	Logic Delay	Net %	Stages	Source Clock	Destination Clock
Path 1	Setup	-0.898	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.855	5.880	25.7	2	ffclk_BUFGP	ffclk_BUFGP
Path 2	Setup	-0.944	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.843	5.880	25.0	2	ffclk_BUFGP	ffclk_BUFGP
Path 3	Setup	-0.864	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.763	5.852	24.6	2	ffclk_BUFGP	ffclk_BUFGP
Path 4	Setup	-0.853	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.752	5.852	24.5	2	ffclk_BUFGP	ffclk_BUFGP
Path 5	Setup	-0.847	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.746	5.880	24.1	2	ffclk_BUFGP	ffclk_BUFGP
Path 6	Setup	-0.832	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.731	5.880	23.9	2	ffclk_BUFGP	ffclk_BUFGP
Path 7	Setup	-0.831	ffEngine/fftinst/armd3/transformLoop[1].ct0.Mmult_n0027	ffEngine/fftinst/armd3/transformLoop[1].ct0.Madd_vReg[15].uReg[15].add_4_OUT1	7.730	5.852	24.3	2	ffclk_BUFGP	ffclk_BUFGP

Figure 40: Selecting the Most Critical Timing Path

The imported timing paths are shown on a constraint-by-constraint basis. When you select paths in the Timing Results view, the Path properties view shows the details of the timing path.

Because the placement was imported, the path is highlighted in the Device view. If needed bring the device view forward. The visualization makes it easy to understand how to take appropriate floorplanning steps to improve the timing.

After running the **Mark** command, the red and green diamonds show the timing path start and end points (Figure).



Figure 41: Placement of the Timing Path

- 9-1-4.** Select **Select > Unmark All** to clear the marks.

Timing paths are grouped by constraints. The worst failing paths are in TS_fftClk. It is useful to look at the paths in other clock domains as well. Select and explore some of the passing paths in TS_usbClk.

- 9-1-5.** Press **Shift** and select all of the paths in TS_usbClk. Do not grab paths from other timing constraints.

- 9-1-6.** Right-click and select the **Schematic** popup menu command.

The Schematic view shows all of the instances on the selected paths (Figure).

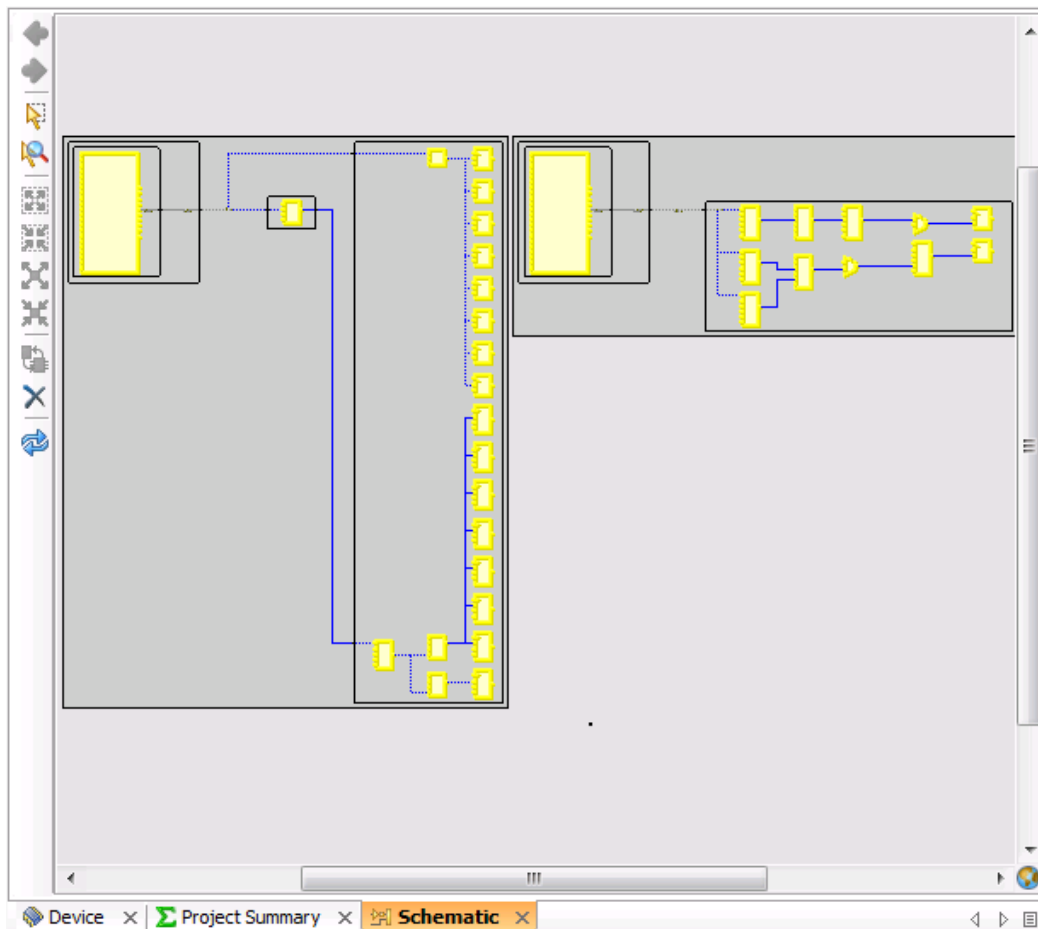


Figure 42: Examining Failing Timing Paths in the Schematic

- 9-1-7.** In the Netlist view, click the Collapse All button.
- 9-1-8.** In the Schematic view, right-click and select the **Select Primitive Parents** popup menu command to select the smallest parent modules that contain all of the instances in the selected paths (Figure).

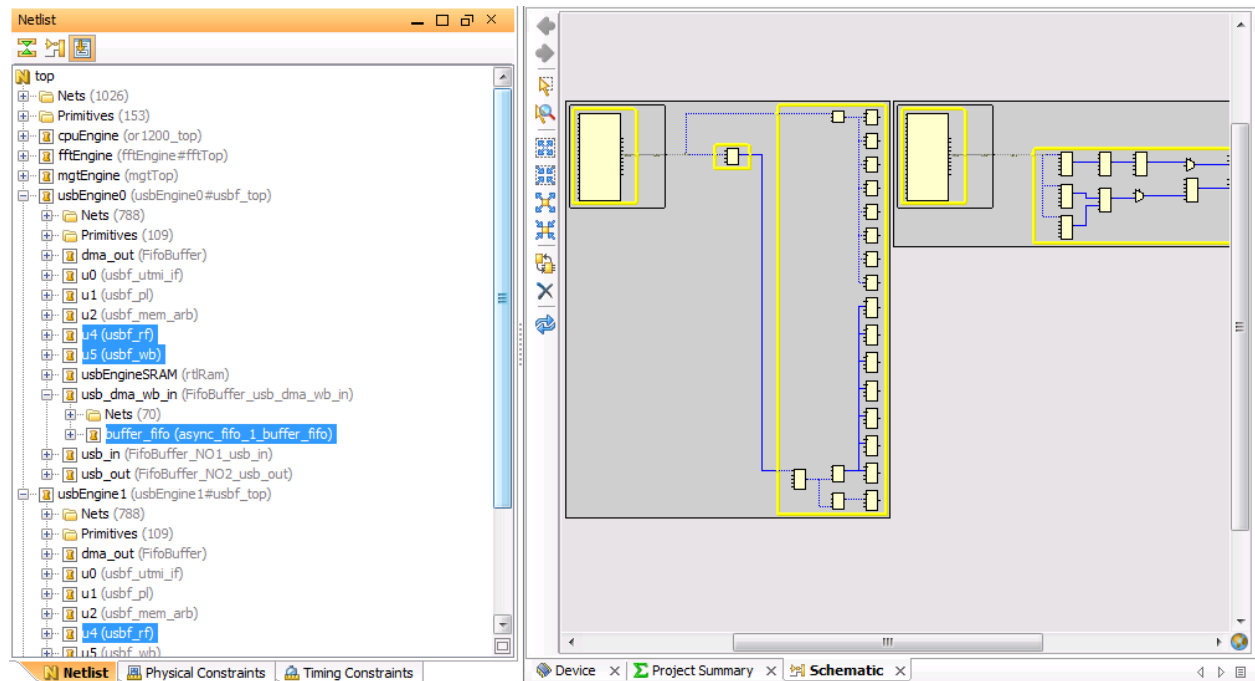




Figure 43: Selecting Path Object Parent Modules for Floorplanning

Notice that the corresponding logic modules are selected in the Netlist view.

9-1-9. Click the X button  to close the open Schematic views.

9-1-10. Switch to the Device View.

9-1-11. From the Device view toolbar, click Hide All Timing Paths button .

Step 10: Highlighting Module Level Placement

Step 10

You can determine a floorplanning strategy by examining previous implementation results. You can analyze module placement and guide Pblock locations by understanding how the logic was implemented without floorplanning.

10-1. Highlight modules with cycling colors to easily view placement.

10-1-1. In the Netlist view, right-click and select **Highlight Primitives > Cycle colors** command.

10-1-2. Click the **Device** tab to view the highlighting.

The primitives in each module are highlighted in a different color (Figure).

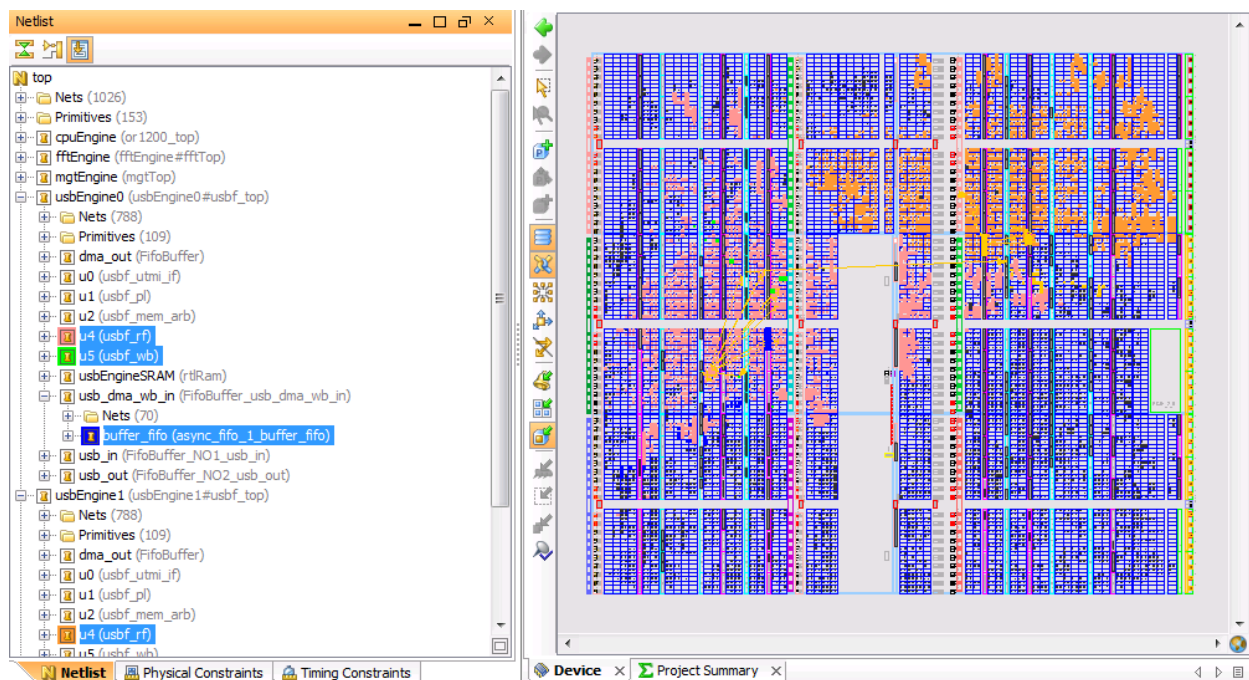




Figure 44: Highlighting Module Placement.

Notice the wide dispersal of the primitives. Scroll around and change the Zoom level. Notice that many of the instances are block RAMs. These might benefit from Floorplanning to improve timing.

Hiding the other placement constraints using the **Show/Hide Placement Constraints**  tool bar button may make the highlighting more visible.

10-1-3. In the main Toolbar, select the **Unhighlight All** button. 

10-1-4. In the Netlist view, click the **Collapse All** button. 

10-1-5. In the Netlist view, select the `usbEngine0` and `usbEngine1` modules.

10-1-6. Right-click and select the **Highlight Primitives > Color 1**. Alternately, use any color that stands out (Figure 45).

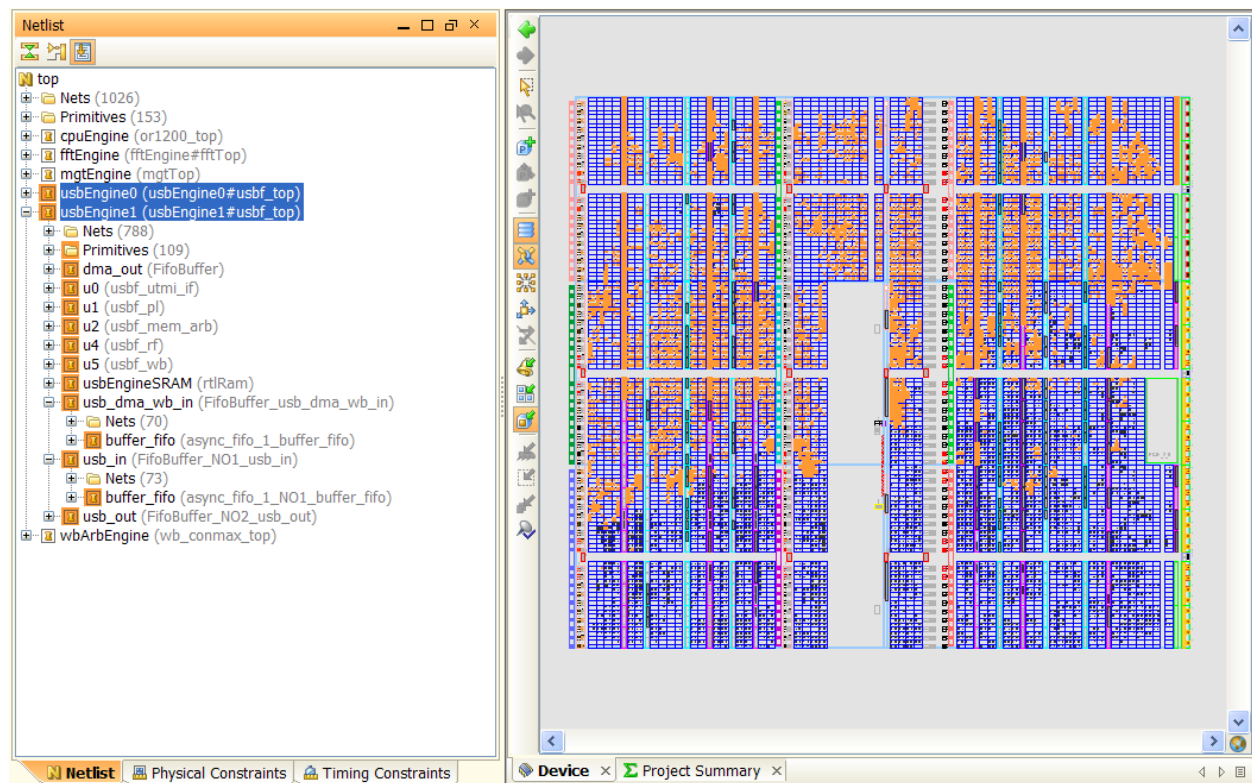



Figure 45: Highlighting USB Netlist Module.

Notice the wide dispersal of the module's placement (Figure 45). `usbEngine1` and `usbEngine0` may be good candidates for floorplanning. Floorplanning will be covered in the next steps.

10-1-7. From the main toolbar, click the Unhighlight All button .


Step 11: Exploring Connectivity


Step 11

The PlanAhead software has extensive logic expansion, selection and highlighting capabilities. These capabilities can be used to validate that modules are suitable to floorplan. For example, logic modules that connect to logic throughout the device may not be suitable for floorplanning, while tightly grouped and self-contained modules are suitable.

Routing congestion and timing inconsistency can be alleviated by floorplanning logic outside of the critical logic areas, preventing logic from migrating into the critical areas.

11-1. Visualize the I/O Connectivity.

11-1-1. In the Device view, turn on the Show/Hide I/O Nets button .

Green lines show the connectivity from the placed logic to the I/O pins (Figure). If no green lines appear, click the Show LOC constraints button .

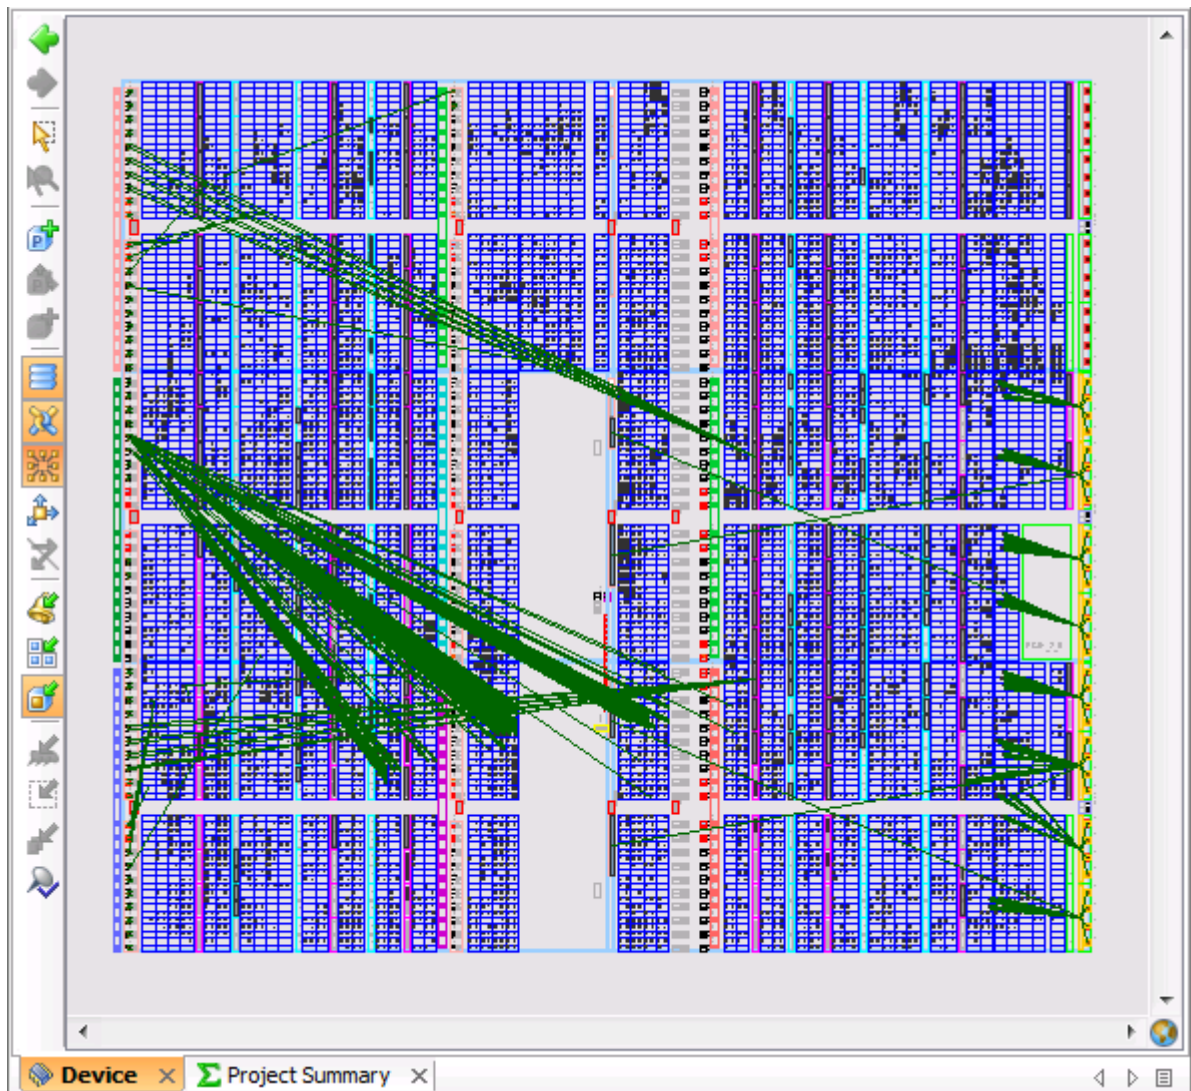



Figure 46: Device View with I/O Connectivity.

Notice the I/O lines on the left side of the chip cross a long distance.

11-1-2. Click one of the I/O Nets that connect to the top part of Bank 14 - the I/O Bank in the bottom left of the chip.

11-1-3. Inspect the Netlist view.

The net is a bit of the bus `usbEngine0/dma_out/buffer_fifo/DataOut_pad_o`.

11-1-4. In the Netlist view, click the Collapse All button. 

11-1-5. In the Netlist view, select `usbEngine0` and `usbEngine1`.

11-1-6. Right-click and select the **Show Connectivity** popup menu command.

Notice that the interface nets that connect `usbEngine0` and `usbEngine1` to the rest of the design are shown in yellow (Figure).

11-1-7. Right-click and select the **Show Connectivity** popup menu command again to select all of the logic objects that the interface nets connect to.

11-1-8. Right-click and select the **Show Connectivity** popup menu command once again to highlight all of the nets that fanout from those selected logic objects.

You can use the Show Connectivity command to highlight or select a cone of logic from any source net or logic object.

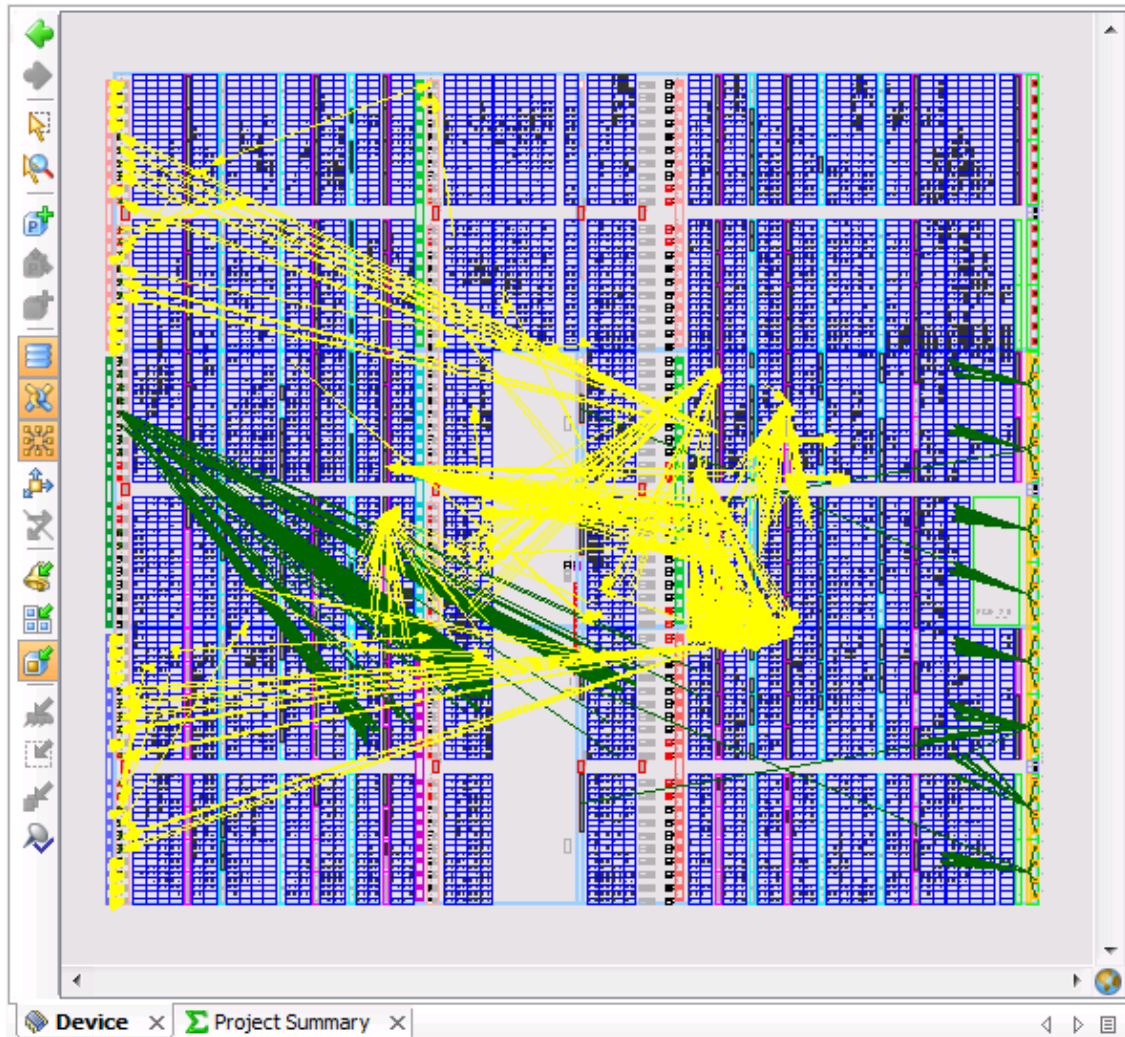


Figure 47: Using the Show Connectivity Command

11-1-9. Click Unselect All  or press F12.

Step 12: Using Placement Constraints

Step 12

This step will show how to look for placement based on primitive type and clear all the placement created by place and route during implementation.

12-1. Viewing Placed Instances.

12-1-1. Select **Edit > Find**.

12-1-2. Change the Primitive field to **Block RAM** (Figure).

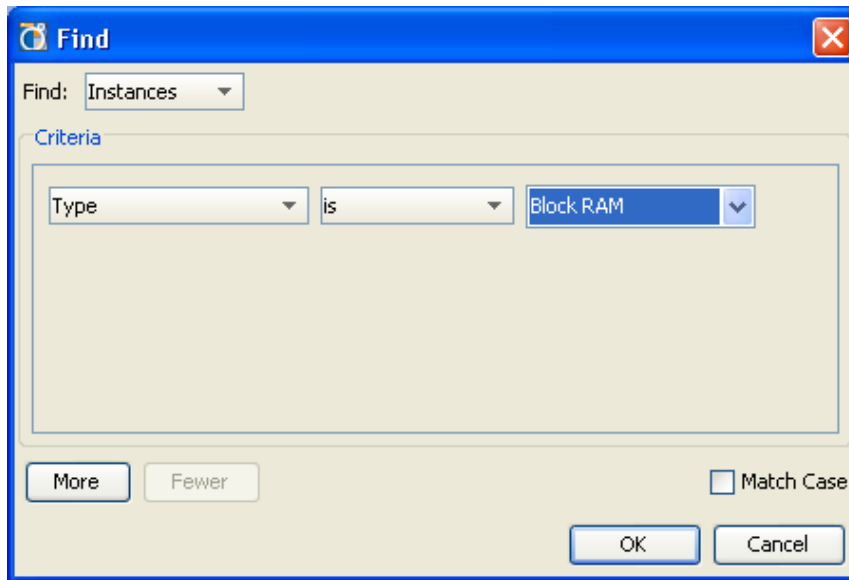


Figure 48: Find Dialog Box

12-1-3. Select **OK**.

12-1-4. Select a Block RAM in the Find Results view.

12-1-5. Use the **Shift** key and select the first and last Block RAM, or press **Ctrl+A** to select all Block RAMs.

The Device view will have all the Block RAMs selected (Figure).

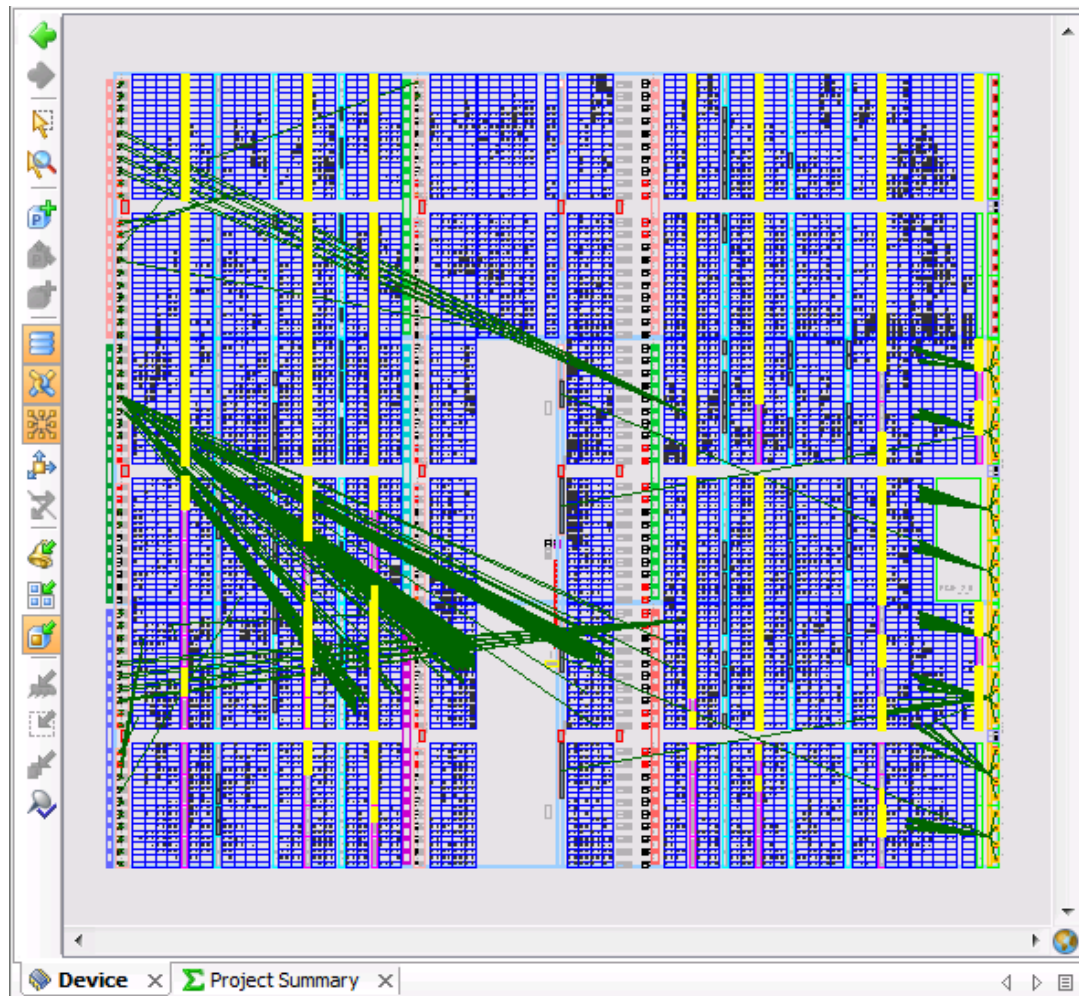



Figure 49: Device View with Block RAMs

If there are a lot of extra nets selected, toggle the Show connections for selected instances button

. It can be useful to select primitive types based on the hierarchy only. Try selecting only the Block RAMs in usbEngine1. Since the Block RAMs are spread out over the device, there is no reason to keep the placement.

12-2. Clear all placement constraints using the Clear Placement Constraints command.

This step will show how to clear out placement to make it easier to understand data flow in a later step. The Clear Placement Constraints dialog box can selectively remove the placement constraints. The I/O and clock related resources are separated from the fabric logic because they usually do not change. This enables you to quickly remove the placement constraints imported from the ISE software runs. Logic type filters are provided to selectively remove placement constraints by type also.

12-2-1. Select **Tools > Clear Placement**.

12-2-2. In the Clear Placement Constraints dialog box, select the **Instance placement** radio button (Figure).

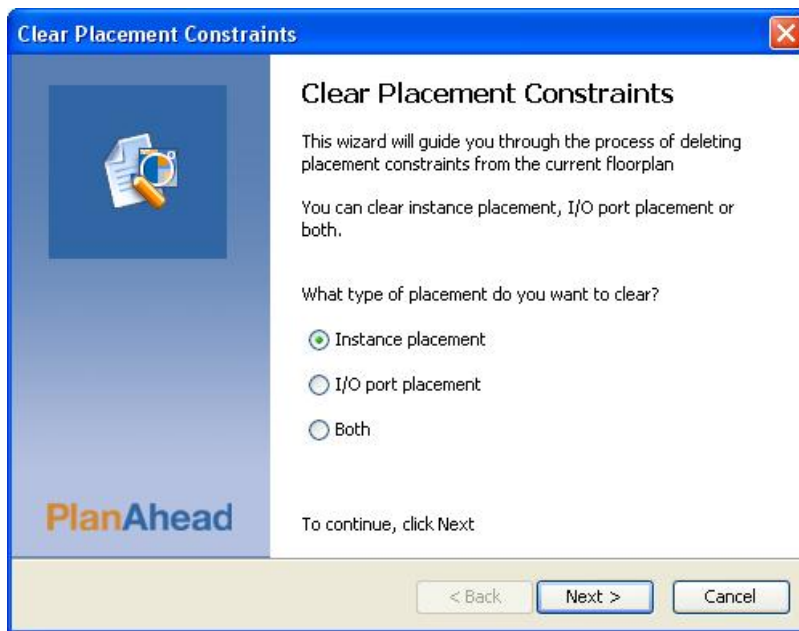


Figure 50: Clearing Placement Constraints

12-2-3. Click **Next** to display the Unplace Instances page.

12-2-4. Select **Unplace All instances**.

12-2-5. Click **Next** to display the Instance Types to Unplace page.

12-2-6. Click **Default** to use the Default selection.

Notice the configurable filters is available to selectively clear or keep logic LOC constraints by type.

12-3. Click Next to display the Fixed Placement page.

12-3-1. Select **Keep 17 Fixed Instances**.

12-3-2. Click **Next** to display the Clear Placement Summary page.

12-3-3. Click **Finish** after reviewing the Summary page.

12-3-4. In the Netlist view, click the Collapse All button .

Step 13: Viewing Hierarchical Connectivity

Step 13

It can be useful to look at the connectivity between the modules of the netlist. In this section, you will use various tools to show the design connectivity. The netlist hierarchy will be broken apart into a physical hierarchy – called a Pblock. The Pblock will be placed to analyze design data flow. The Pblock is saved into the constraints file as an AREA_GROUP constraint.



13-1. Use the Auto-create Pblocks command to split up the top level of the Design

13-1-1. Select **Tools > Auto-create Pblocks**.

In the dialog box, review the options with which you can define the maximum number of Pblocks to create and specify the minimum Pblock size.

If more modules exist than the total number of Pblocks specified for creation, the PlanAhead software creates Pblocks with the largest modules.

13-1-2. Click **OK** to accept the six selected modules.

Notice the top-level Pblocks in the Physical Constraints view (Figure). In the Netlist view the icon next to the 6 modules changed from  to  to show the instance had been placed in a Pblock.

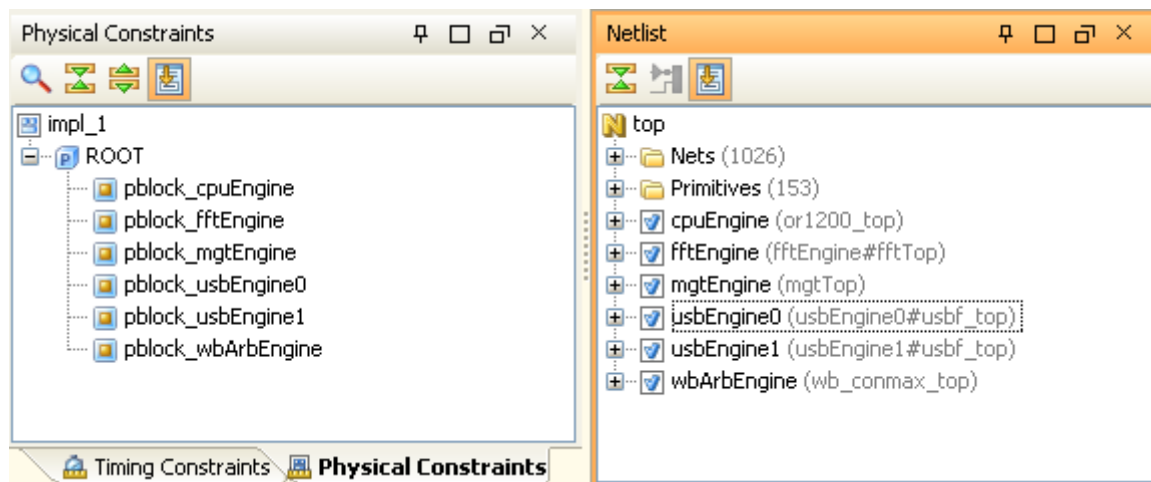


Figure 51: Partitioning the Top-level Design

13-2. Use the Place Pblocks command to place the newly created Pblocks.

13-2-1. Select **Tools > Place Pblocks**.

Notice that the Place Pblocks dialog box contains options with which you can select Pblocks to place and to adjust the target SLICE utilization sizes on Pblocks.

Note: The Place Pblocks command is intended to quickly create selected Pblocks. Pblocks are sized based on SLICE logic only. Other non-SLICE ranges are not considered. Therefore, the Pblocks created using the Place Pblocks command might need modification to pass through the implementation tools successfully.

13-2-2. Click **OK** to place the Pblocks (Figure).

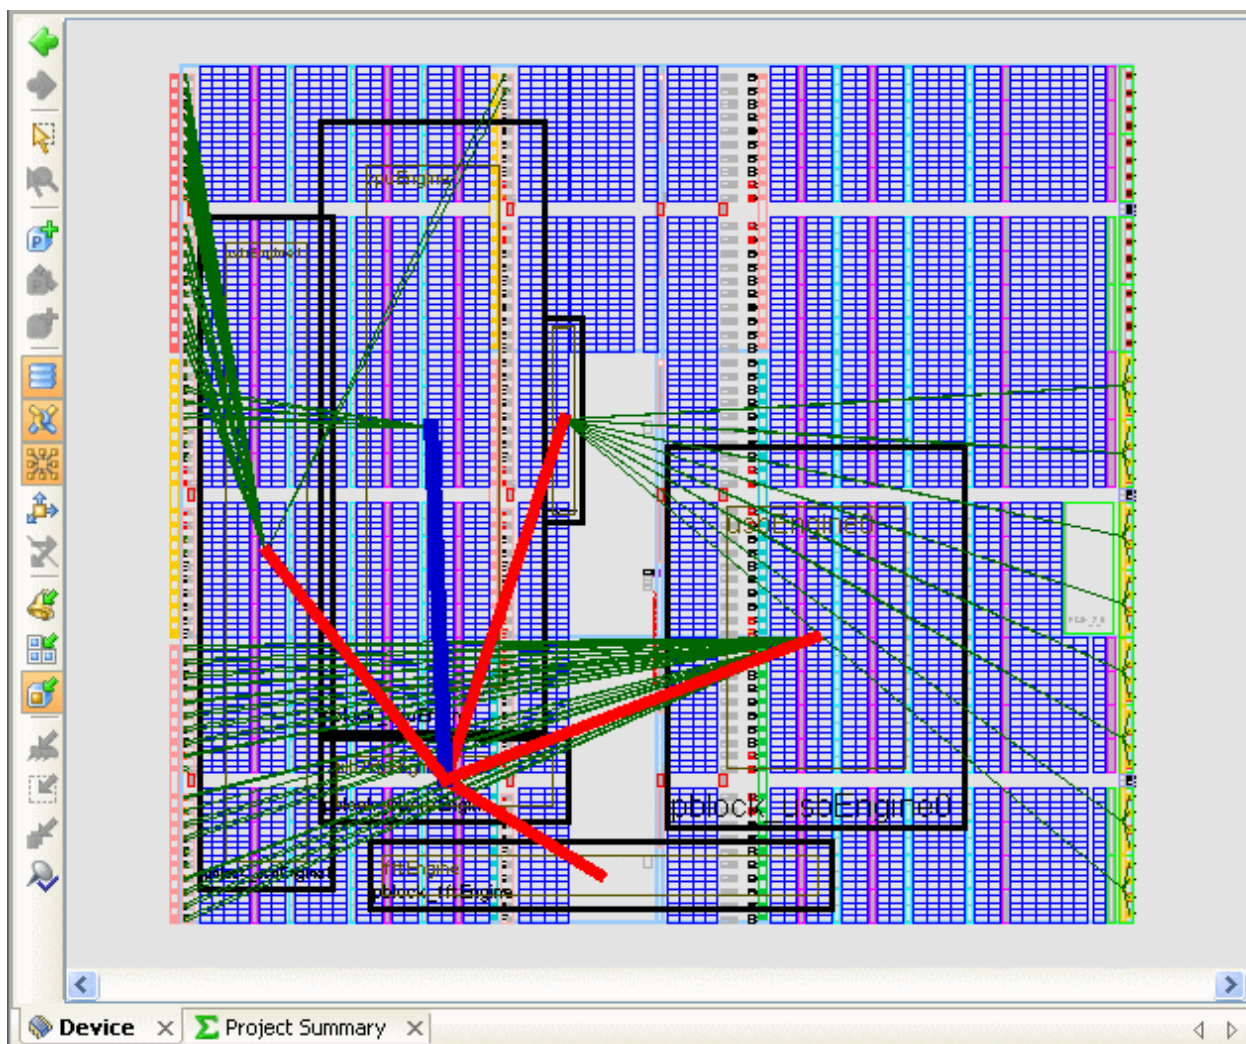




Figure 52: Place Top-Level Pblocks

The Place Pblocks command may place the Pblocks differently from one run to the next. The placement might not be identical to the placement shown.

- 13-2-3.** If connectivity is not displayed, make sure that the Show/Hide I/O Nets toolbar button  and Show/Hide Bundle Nets toolbar button  in the Device view are toggled on.

Hint: You can use these buttons throughout this tutorial to turn connectivity display on and off.

The bundle nets and I/O flight lines help to visualize the connectivity in the design. Pblocks can quickly be arranged to untangle the connectivity. This provides early indications of data flow through the design and highlights where potential routing congestion could occur. Bundles show the number of nets shared between two Pblocks. To see the definitions go to **Tools > Options > Themes > Bundle Nets**.

13-3. Adjust the placement and size the Pblocks based on connectivity and resources.

13-3-1. If needed, adjust the placement of the Pblocks to untangle the connectivity (Figure).

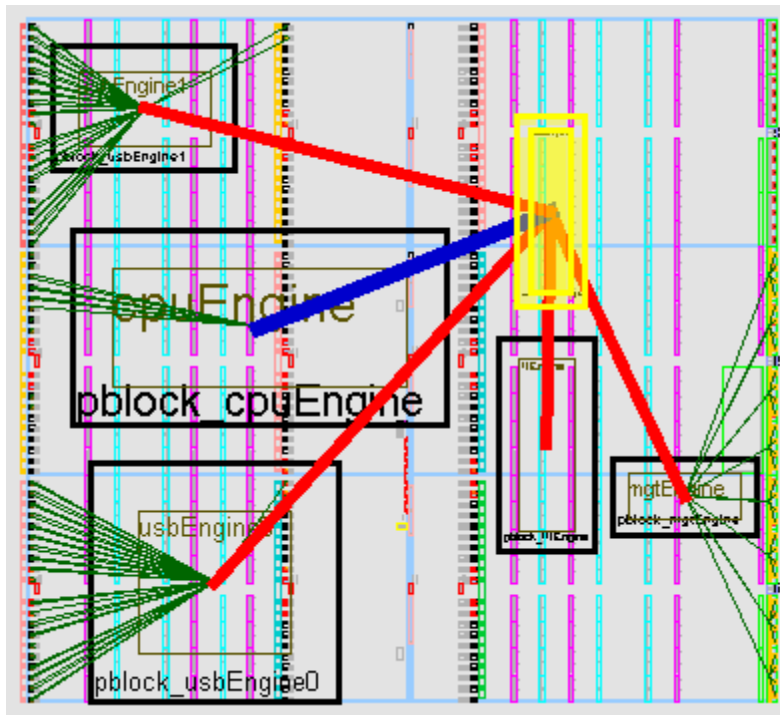



Figure 53: Reshaping Pblocks to Display Hierarchical Connectivity

Hint: In the Device view, use the Set Pblock Size toolbar button  to redraw rectangles anywhere in the device. Move or redraw the rectangles to show a clear diagram of the logic connectivity. At this point, you do not need to size the Pblock to satisfy the resource requirements.

13-3-2. Click **OK** in the Set Pblock dialog box to accept all Grid Types within the Pblock rectangle.

Note the connectivity to `usbEngine1` and `usbEngine0`. These two blocks have timing issues. Look at the I/O connectivity to see where the two blocks might be placed.

13-3-3. Select a Pblock, and click the **Statistics** tab in the Pblock Properties view (Figure).

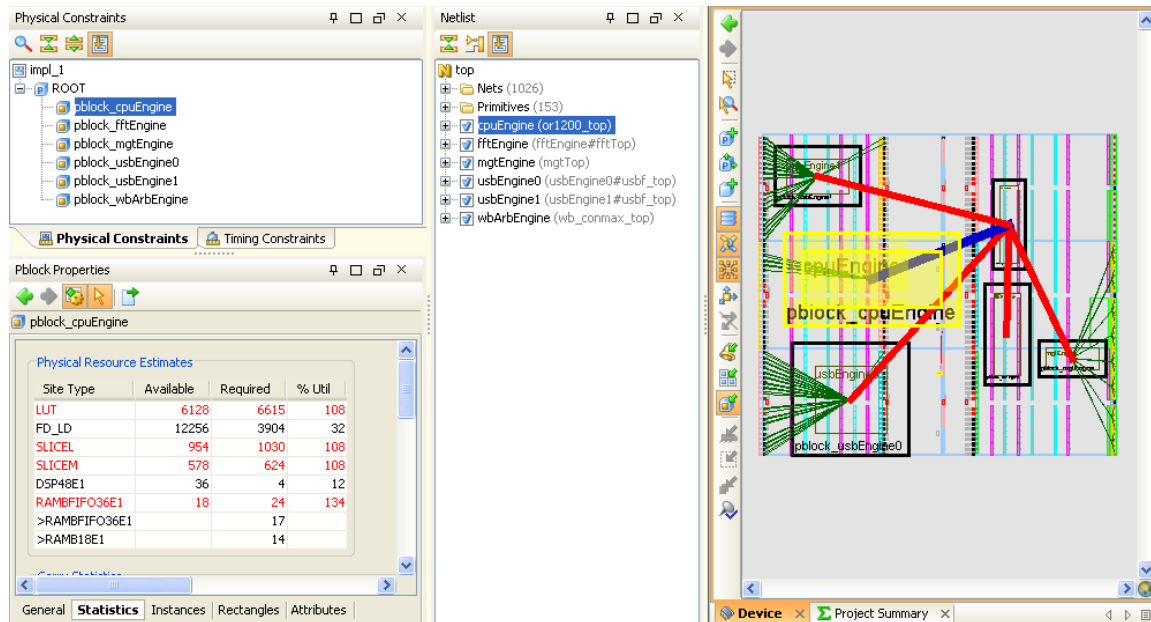


Figure 54: Sizing Pblocks Based on Resource Estimation

Notice the Physical Resource Estimates for the Pblock. You can use these resources when sizing Pblocks to ensure adequate resources exist within the Pblock rectangle in order to accommodate the logic to which it is assigned.

13-3-4. Scroll down the list of Pblock Property Statistics.

It is often easier to create floorplans and manipulate Pblocks when certain objects are made non-selectable, such as IO nets, bundle nets and instances.

13-4. Set the View Options to make some objects not selectable.

13-4-1. Select **Tools > Options**.

13-4-2. In the PlanAhead Options dialog box, click the **Themes** category on the left to show the color Themes options.

13-4-3. At the bottom of the dialog box, click the **Device** tab.

13-4-4. In the Select column, deselect the Assigned Instance and IO Net object types (Figure).

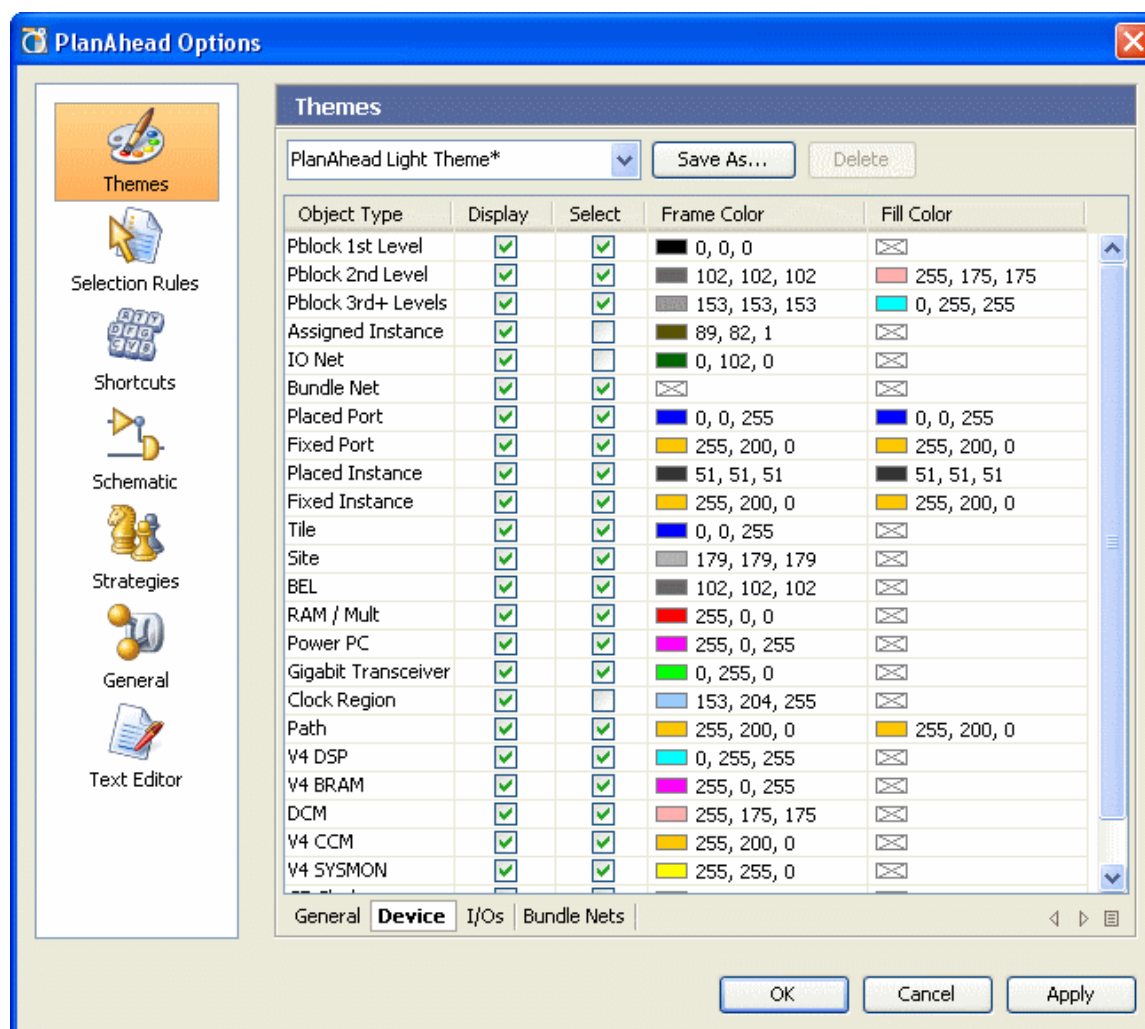


Figure 55: Setting View Options

13-4-5. Click the **Save As** button, enter a name of your choice, and click **OK**.

Notice that you can save your own custom view option configurations for use later.

13-4-6. Change back to the **PlanAhead Dark Theme** or **PlanAhead Light Theme**.

13-4-7. Click **OK**.

The PlanAhead software displays the connections between the Pblocks with bundle nets. The color and line width of a bundle net indicate the number of signals within the bundle. The settings for color, net count, and line width are configurable in the Bundle Nets tab of the PlanAhead Options dialog box.

13-5. Examine the Bundle Net Properties.

13-5-1. In the Device view, select one of the colored bundle nets.

13-5-2. Examine the Bundle Nets Properties view.

13-5-3. In the Bundle Net Properties view, click the **Properties** tab to see a list of all the nets contained within the bundle between the two modules (Figure).

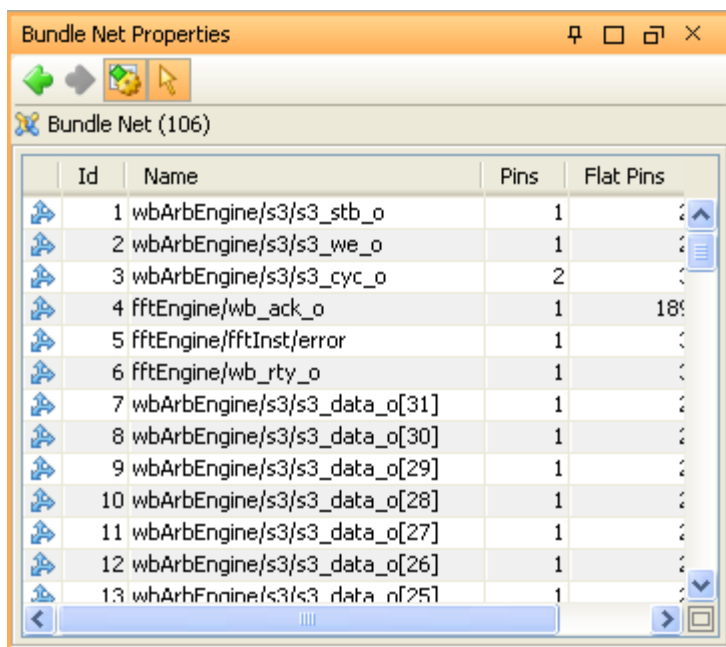


Figure 56: Displaying Bundle Net Properties

Step 14: Using the Search Capability to View Clock Domains Step 14

Effective floorplanning is often dependent on proper placement of the synchronous elements in different clock domains. You can highlight clock domains to visualize connectivity, enabling proper Pblock placement relative to clock regions. This step will floorplan the design to understand data flow and design connectivity. Pblocks will be created for every level of design hierarchy. Running the design through Implementation with all these pblocks would hurt timing. At the end of the step, the pblocks will be erased. The next step will floorplan a little differently to improve performance.

14-1. Select and mark the global clock nets.

14-1-1. Select **Edit > Find**.

14-1-2. In the Find dialog box, set the following options:

- Find: **Nets**
- First field: **Type**
- Second field: **is**
- Third field: **Global Clock**

14-1-3. Ensure the **Unique Nets Only** button is enabled, and click **OK**.

14-1-4. Select the Pins column header *twice* to sort the Find Results view.

14-1-5. In the Find Results view list, select `usbClk_BUFGP`.

Notice the highlighted net leading to I/Os in the two `usbEngine` Pblocks (Figure).

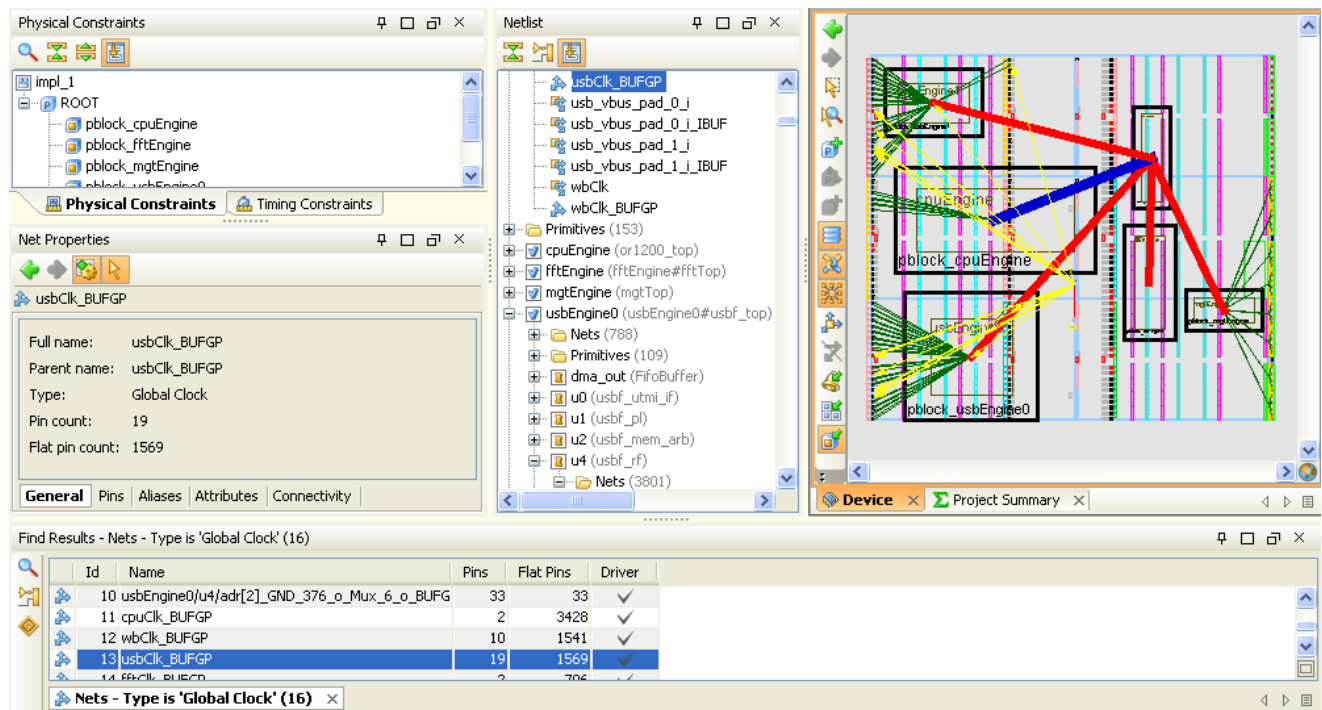


Figure 57: Viewing Clock Net Destinations

14-2. Use the Schematic View to see how the global clock net fans out to the primitives in the design.

14-2-1. With the global clock net still selected in the Find Results view, right-click and select the **Schematic** popup menu command.

The Schematic view shows the `usbClk_BUFGP` net connected to a group of registers.

14-2-2. At the top of the schematic, Zoom in on the `usbClk_BUFGP` BUFGP (Figure).

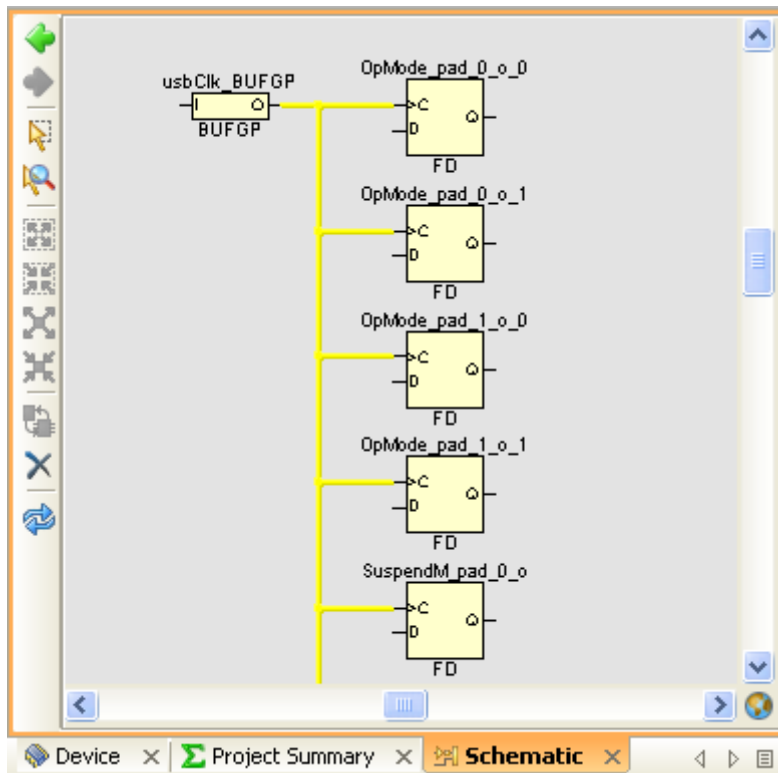


Figure 58: Viewing the Clock Signal in the Schematic

14-2-3. Close the Schematic view.

14-2-4. In the Physical Constraints view, press the **Shift** key, and select all six Pblocks.

14-2-5. Select the Delete toolbar button. 

14-2-6. If prompted, select **OK** to confirm the deletion.


Step 15: Floorplanning Timing-Critical Hierarchy

Step 15

Floorplanning timing critical hierarchy or hierarchy that talks to IOs with limited internal connectivity can improve timing performance. The previous steps show that `usbEngine1` and `usbEngine0` talk to IOs on the left side of the chip. The `usbEngine1` and `usbEngine0` can go in the corners on the left-hand side. Unlike the previous step, this step will floorplan just a couple hierarchies.


15-1. Place Pblocks for timing critical hierarchy.

15-1-1. Click the **Device** tab.

15-1-2. In the Device view, ensure that I/O Nets are being displayed .

15-1-3. In the Netlist view, select the Collapse All button .

15-1-4. In the Netlist view, select `usbEngine0`.

15-1-5. From the Device view toolbar, select Draw Pblock .

The cursor turns to a cross.

15-1-6. Draw a rectangle in the bottom left-corner of the device view.

15-1-7. Click **OK** to dismiss the New Pblock dialog box.

15-1-8. Look at the Pblock Properties.

15-1-9. Click on the **Statistics** tab.

This Pblock is being sized to go through implementation.

15-1-10. Size the Pblock to have 100% block RAM Utilization and approximately 60% Slices utilization. Do not span the center column gap. See Figure for the Pblock placement.

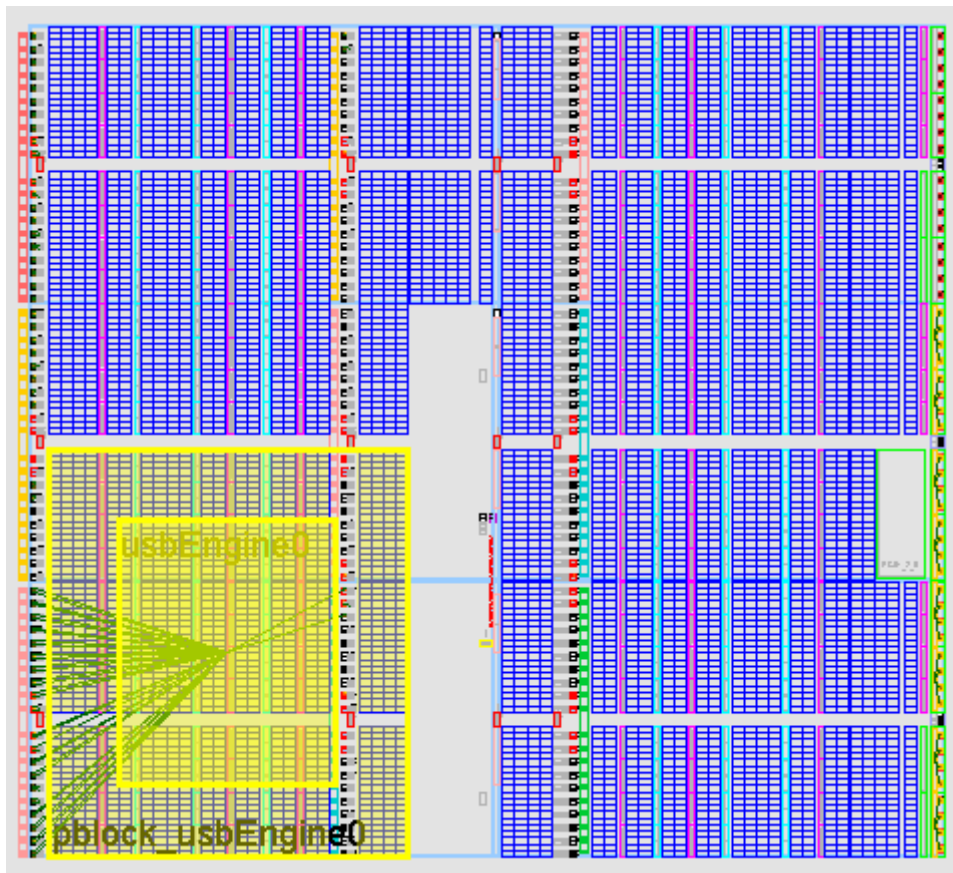


Figure 59: usbEngine0 Placed

- 15-1-11.** Select `usbEngine1` from the netlist view and create a similar Pblock in the top left.
- 15-1-12.** Do not overlap the Pblocks. The end result will look like Figure 60.

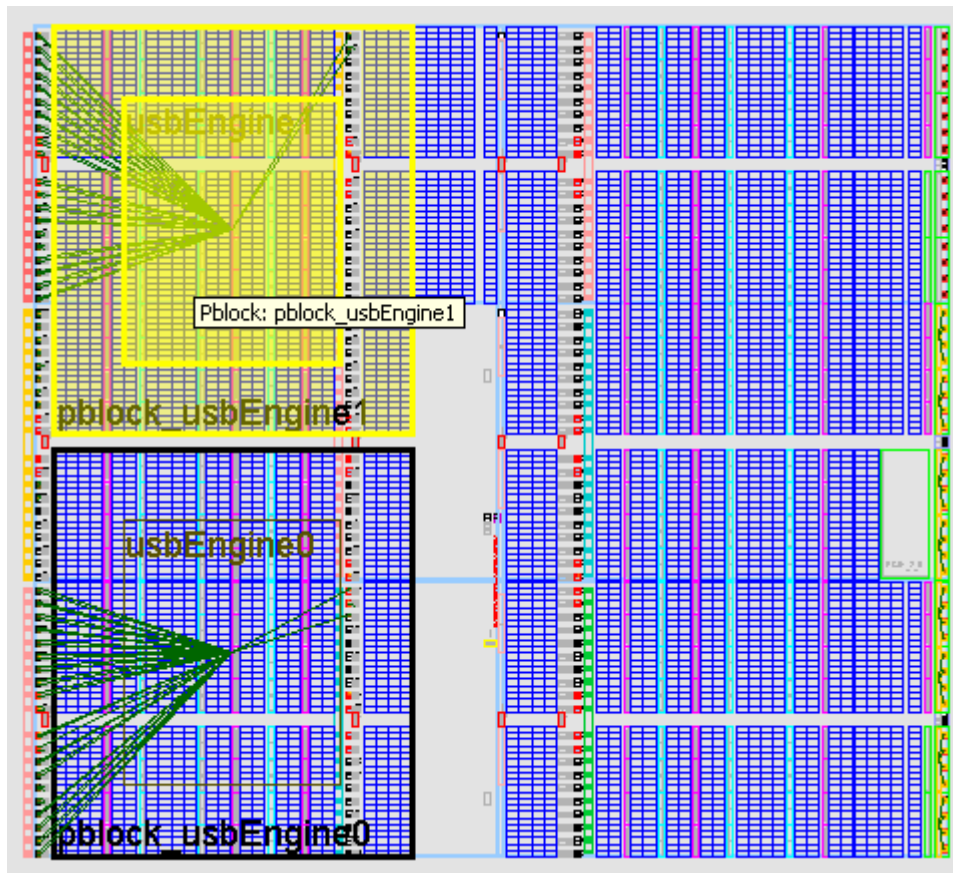


Figure 60: Floorplan both USB Timing Critical Blocks

15-1-13. In the top right of the Implemented Design, click X.

15-1-14. Click **OK** and **Yes** to save.

The tool returns to the Project Manager.

15-1-15. In the Sources view, open `top_full.ucf`. Scroll to the bottom of the UCF and notice the new AREA_GROUP lines. The design could be run through implementation.

15-2. Optional step - run the floorplan through P+R to see how timing changes.

15-2-1. Click the green **Implement** button again.

15-2-2. Click **OK** when the tool asks if it should re-run implementation.

15-2-3. When implementation finishes re-load and inspect the timing.

Note: This floorplan improves timing but does not close timing. If you are not seeing timing improvement you can use a floorplan that ships with the tool by doing the following:

- 1) Select **constrs_2** in the Sources window.
- 2) Choose **Make Active** from the popup window.
- 3) Click **Implement**.

Conclusion

In this tutorial, you used the PlanAhead software to explore and analyze the synthesized design and targeted device prior to running the implementation tools. This enabled you to find potential design issues and errors early in the design cycle, rather than discovering issues during implementation. In addition, you used the graphical presentation of design resource estimates, design rule violations, timing estimation, constraints and connectivity to help you understand your design and any potential problem areas.

After running the design through the implementation tools, you viewed implementation results and examined timing results. You then analyzed critical path objects in the schematic, and selected the parent modules of those path objects. You highlighted module placement and displayed the connectivity of the modules using the **Show Connectivity** command. You cleared the ISE software-assigned placement. After analyzing the design, you created a floorplan to improve timing.